

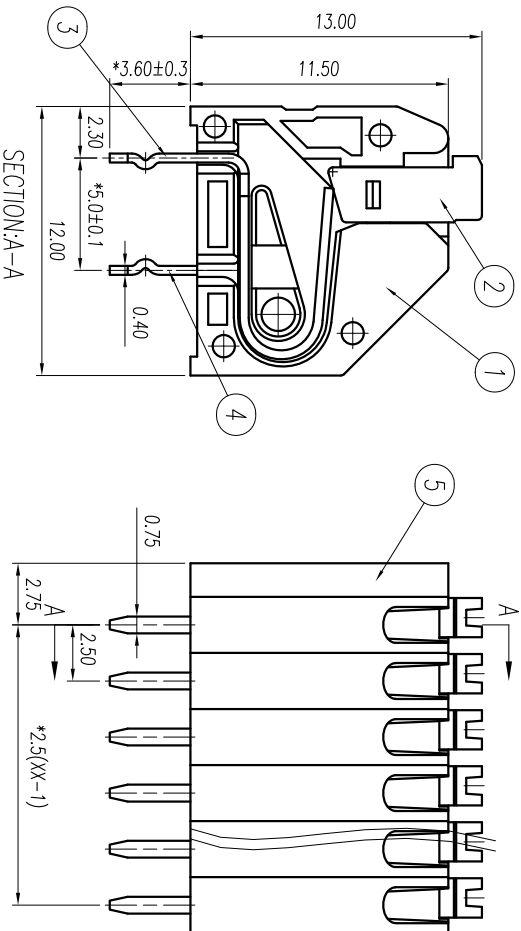


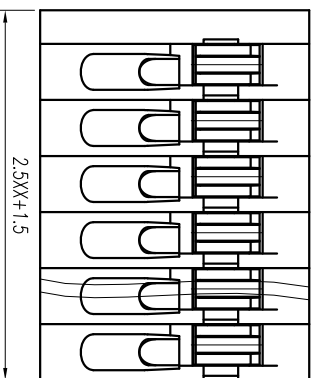

慈溪市万捷电子有限公司

CIXI WANJIE ELECTRONIC CO., LTD

产品规格书
THE SPEC SHEET

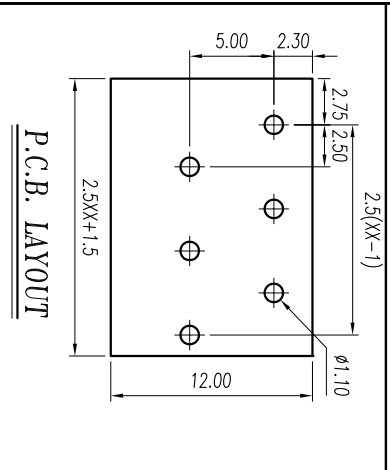

电气性能/Electrical

参考标准/Standard	UL	IEC
额定电压/Rated voltage	300V	250V
额定电流/Rated current	4A	6A
接触电阻/Contact resistance	20mΩ	
绝缘电阻/Insulation resistance	500MΩ/DC500V	
使用线径/Wire range	28-20AWG	0.5mm ²
耐压/Wrth standing voltage	AC 2000V/1 Min	
机械性能/Mechanical		
温度范围/Temp.Range	-40°C~+105°C	
瞬时温度/MAX Soldering	+250°C, for 5 Sec	
剥线长度/Steip Length	9-10mm	
尺寸/Dimensions		
间距/Pitch	2.5mm	
极数/Poles	1~XXP	
材质及电镀/Material	PA66, UL94V-0	
塑料/Housing	Phosphor bronze, Tin plated	
焊脚/Pin header		

variable range	over 6 to	over 10 to	over 18 to	over 30 to	over 50 to	over 80 to	over 120 to	over 160 to	over 200 to	over 250 to	all	over 5 to	over 30 to	over 120 to
	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06

linear dimension(Tolerances Standard GB/T 14486-2008)

≡ — □ // ⊥

单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	3:1
----------	----	---------	----	----------	-----

名称/TITLE	第三视图/THIRD ANGLE PROJECTION
	WJ250-2.5-XXP-1YY-00A

