



Ulite Electronics Co.,LTD

Special manufacturer of terminal blocks since 2010 Year

直插式弹簧接线端子接线 / 拆线三步骤





PT 系列

直插式弹簧接线端子

趋势款

1.5mm²

1.5mm²



主要参数	
技术参数 Technical data	
额定电流 (A) Rated current	17.5
额定电压 (V) Rated voltage	500
额定截面积 Rated cross-section	1.5
额定冲击电压 (KV) 污染等级 / 过压等级 / 材料级别 Rated impulse withstand voltage/pollution severity	6/3/ III / I
绝缘材料 / 阻燃等级根据标准 UL94 认证 Insulating material/ul94flammability rating material	PA66/V0
剥线长度 (mm) Wire stripping length	8-10

PT-1.5	
IEC	UL
17.5	15
500	300
1.5	AWG26-14
6/3/ III / I	6/3/ III / I
PA66/V0	PA66/V0
8-10	

PT-1.5/3	
IEC	UL
17.5	15
500	300
1.5	AWG26-14
6/3/ III / I	6/3/ III / I
PA66/V0	PA66/V0
8-10	

基础参数	
尺寸图 Size chart	

基础参数	
尺寸图 Size chart	

多动颜色可选 Customized color




- 常规
- 定制
- 定制

- 常规
- 定制
- 定制

1.5mm²

2.5mm²

2.5mm²



PT-1.5/4	
IEC	UL
17.5	15
500	300
1.5	AWG26-14
6/3/ III / I	6/3/ III / I
PA66/V0	PA66/V0
8-10	

PT-2.5	
IEC	UL
24	20
800	600
0.3-2.5	AWG24-14
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0
8-10	

PT-2.5/3	
IEC	UL
24	20
800	600
0.3-2.5	AWG24-14
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0
8-10	

基础参数	
尺寸图 Size chart	

基础参数	
尺寸图 Size chart	

基础参数	
尺寸图 Size chart	

- 常规
- 定制
- 定制

- 常规
- 定制
- 定制




- 常规
- 定制
- 定制

Din rail terminal blocks

2.5mm²

4mm²

4mm²



PT-2.5/4	
IEC	UL
24	20
800	600
0.3-2.5	AWG24-14
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0

PT-4	
IEC	UL
32	30
800	600
0.5-4	AWG22-12
8/3/ III / I	6/3/ III / I
PA66/V0	PA66/V0



PT-4/3	
IEC	UL
32	30
800	600
0.2-4	AWG28-10
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0

8-10

10

8-10

基础参数



- 常规
- 定制
- 定制




- 常规
- 定制
- 定制

- 常规
- 定制
- 定制

2.5mm²

2.5mm²

2.5mm²



PTTB-2.5	
IEC	UL
24	20
500	300
0.3-2.5	AWG24-14
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0

PTTB-2.5-PV	
IEC	UL
22	20
500	300
0.3-2.5	AWG24-14
6/3/ III / I	6/3/ III / I
PA66/V0	PA66/V0




PTTB-2.5-DIO	
IEC	UL
24	20
500	300
0.3-2.5	AWG24-14
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0

8-10

8-10

8-10

基础参数





- 常规
- 定制
- 定制

- 常规
- 定制
- 定制

- 常规
- 定制
- 定制

4mm²

6mm²




PT-4/4	
IEC	UL
32	30
800	600
0.2-4	AWG28-10
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0

PT-6	
IEC	UL
41	40
800	600
0.5-6	AWG22-10
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0

8-10

12

基础参数



- 常规
- 定制
- 定制





- 常规
- 定制
- 定制

2.5mm²

2.5mm²

1.5mm²

1.5mm²



PT-2.5T	
IEC	UL
24	20
800	600
2.5	AWG26-14
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0

PT-2.5Z	
IEC	UL
24	20
500	600
2.5	AWG26-12
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0

PTTB-1.5	
IEC	UL
16	15
500	300
1.5	AWG26-14
6/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0

PTTB-1.5-PV	
IEC	UL
16	15
500	300
1.5	AWG26-14
6/3/ III / I	6/3/ III / I
PA66/V0	PA66/V0




8-10

8-10

8-10

8-10

基础参数



- 常规
- 定制
- 定制


- 常规
- 定制
- 定制

- 常规
- 定制
- 定制


- 常规
- 定制
- 定制

Din rail terminal blocks


2.5mm²



2.5mm²



2.5mm²




JPT-2.5PE	
IEC	UL
-	-
0.3-2.5	AWG24-14
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0
8-10	


JPT-2.5/3PE	
IEC	UL
-	-
0.3-2.5	AWG24-14
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0
8-10	

JPT-2.5/4PE	
IEC	UL
-	-
0.3-2.5	AWG24-14
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0
8-10	


基础参数



● 常规



● 常规



● 常规

ST 系列

回拉式弹簧接线端子

主打款


主要参数	
技术参数 Technical data	
额定电流 (A) Rated current	17.5
额定电压 (V) Rated voltage	500
额定截面积 Rated cross-section	0.2-1.5
额定冲击电压 (KV) 污染等级 / 过压等级 / 材料级别 Rared impulse withstand voltage/pollution severity	8/3/ III / I
绝缘材料 / 阻燃等级根据标准 UL94 认证 Insulating material/ul94fammability rating material	PA66/V0
剥线长度 (mm) Wire striping length	8-10

基础参数


尺寸图 Size chart

多动颜色可选 Customized color

1.5mm²



1.5mm²



ST-1.5	
IEC	UL
17.5	15
500	300
0.2-1.5	AWG26-14
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0
8-10	

ST-1.5/3	
IEC	UL
17.5	15
500	300
0.2-1.5	AWG26-14
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0
8-10	




● 常规
● 定制
● 定制




● 常规
● 定制
● 定制


4mm²



6mm²



2.5mm²




PT-4PE	
IEC	UL
-	-
0.5-4	AWG22-12
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0
10	

PT-6PE	
IEC	UL
-	-
0.5-6	AWG24-10
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0
12	

PTTB-2.5-PE	
IEC	UL
-	-
0.2-2.5	AWG24-14
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0
8-10	


基础参数



● 常规




● 常规




● 常规


1.5mm²



2.5mm²



2.5mm²



ST-1.5/4	
IEC	UL
17.5	15
500	300
0.2-1.5	AWG26-14
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0
8-10	

基础参数



● 常规
● 定制
● 定制

ST-2.5	
IEC	UL
24	20
800	600
0.2-2.5	AWG28-12
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0
8-10	


基础参数



● 常规
● 定制
● 定制

ST-2.5/3	
IEC	UL
24	20
800	600
0.2-2.5	AWG28-12
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0
8-10	

基础参数



● 常规
● 定制
● 定制

Din rail terminal blocks



ST 系列

回拉式弹簧接线端子

主打款

2.5mm²

4mm²





主要参数	
技术参数 Technical data	
额定电流 (A) Rated current	24
额定电压 (V) Rated voltage	800
额定截面积 Rated cross-section	0.2-2.5
额定冲击电压 (KV) 污染等级 / 过压等级 / 材料级别 Rated impulse withstand voltage/pollution severity	8/3/ III / I
绝缘材料 / 阻燃等级根据标准 UL94 认证 Insulating material/ul94flammability rating material	PA66/V0
剥线长度 (mm) Wire striping length	8-10

ST-2.5/4	
IEC	UL
24	20
800	600
0.2-2.5	AWG28-12
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0
8-10	

ST-4	
IEC	UL
32	30
800	600
0.2-4	AWG28-10
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0
8-10	

基础参数	
尺寸图 Size chart	

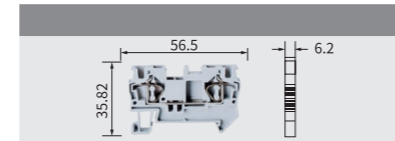

多动颜色可选 Customized color

- 常规
- 定制
- 定制

- 常规
- 定制
- 定制



ST 系列

回拉式弹簧接线端子

主打款

6mm²

10mm²





主要参数	
技术参数 Technical data	
额定电流 (A) Rated current	41
额定电压 (V) Rated voltage	800
额定截面积 Rated cross-section	0.5-6
额定冲击电压 (KV) 污染等级 / 过压等级 / 材料级别 Rated impulse withstand voltage/pollution severity	8/3/ III / I
绝缘材料 / 阻燃等级根据标准 UL94 认证 Insulating material/ul94flammability rating material	PA66/V0
剥线长度 (mm) Wire striping length	12

ST-6/3	
IEC	UL
41	30
800	600
0.5-6	AWG24-8
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0
12	

ST-10	
IEC	UL
57	50
800	600
1.5-10	AWG16-6
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0
18	

基础参数	
尺寸图 Size chart	

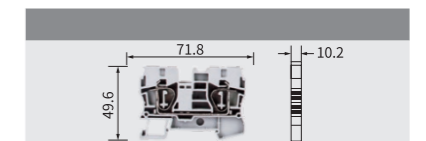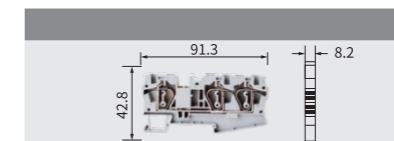

多动颜色可选 Customized color

- 常规
- 定制
- 定制

- 常规
- 定制
- 定制

4mm²







4mm²

6mm²

10 mm²

16mm²

35mm²

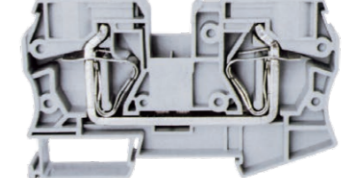

ST-4/3	
IEC	UL
32	30
800	600
0.2-4	AWG28-10
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0
8-10	

ST-4/4	
IEC	UL
32	30
800	600
0.2-4	AWG28-10
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0
8-10	



ST-6	
IEC	UL
41	35
800	600
0.5-6	AWG24-8
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0
12	

ST-10/3	
IEC	UL
57	50
800	600
1.5-10	AWG28-10
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0
8-10	



ST-16	
IEC	UL
76	65
800	600
1.5-16	AWG16-4
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0
12	

ST-35	
IEC	UL
125	115
800	600
2.5-35	AWG14-2
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0
12	

基础参数	
尺寸图 Size chart	

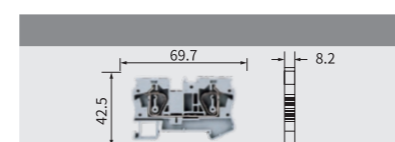

基础参数	
尺寸图 Size chart	

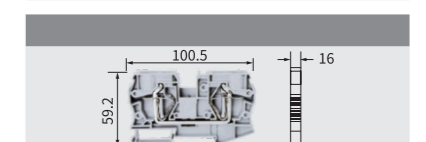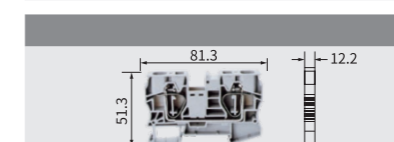

- 常规
- 定制
- 定制

- 常规
- 定制
- 定制



- 常规
- 定制
- 定制

Din rail terminal blocks

ST 系列

回拉式弹簧接线端子

主打款

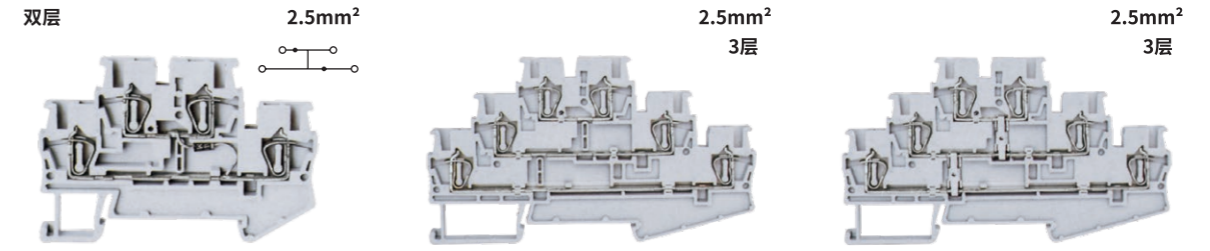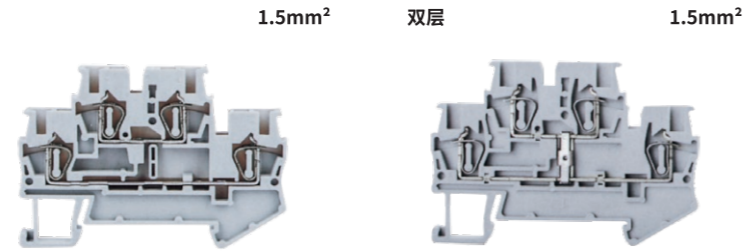

主要参数	
技术参数 Technical data	
额定电流 (A) Rated current	17.5
额定电压 (V) Rated voltage	500
额定截面积 Rated cross-section	0.2-1.5
额定冲击电压 (KV) 污染等级 / 过压等级 / 材料级别 Rared impulse withstand voltage/pollution severity	6/3/ III / I
绝缘材料 / 阻燃等级根据标准 UL94 认证 Insulating material/ul94fammability rating material	PA66/V0
剥线长度 (mm) Wire striping length	8-10

STTB-1.5	
IEC	UL
17.5	15
500	300
0.2-1.5	AWG26-14
6/3/ III / I	6/3/ III / I
PA66/V0	PA66/V0
8-10	






STTB-1.5-PV	
IEC	UL
17.5	15
500	600
0.2-1.5	AWG28-12
6/3/ III / I	6/3/ III / I
PA66/V0	PA66/V0
8-10	

STTB-2.5-DIO 二极管端子	
IEC	UL
由二极管限定	15
500	300
0.2-2.5	AWG28-12
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0
8-10	

ST-2.5/2/3	
IEC	UL
24	-
500	-
0.2-2.5	AWG28-12
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0
8-10	

ST-2.5/2/3-PV	
IEC	UL
24	-
500	-
0.2-2.5	AWG28-12
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0
8-10	

基础参数	
尺寸图 Size chart	

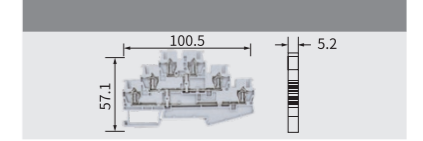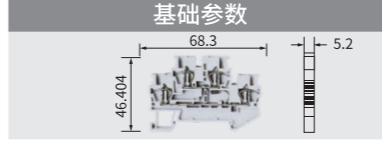

多动颜色可选 Customized color


- 常规
- 定制
- 定制

- 常规
- 定制
- 定制

- 常规
- 定制
- 定制

- 常规
- 定制
- 定制

- 常规
- 定制
- 定制

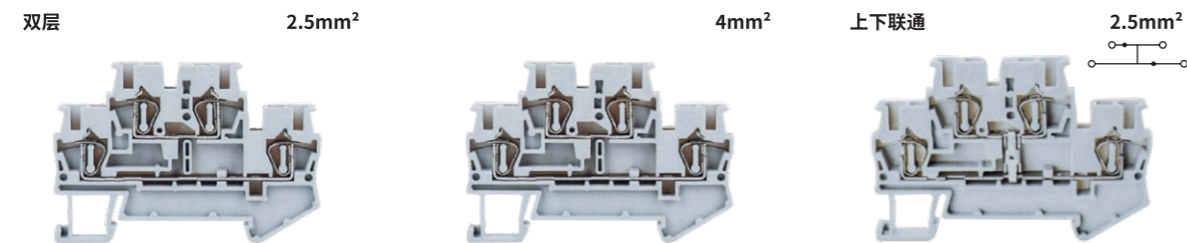

ST 系列

回拉式弹簧接线端子

主打款

STTB-2.5	
IEC	UL
22	20
500	300
0.2-2.5	AWG28-12
6/3/ III / I	6/3/ III / I
PA66/V0	PA66/V0
8-10	

STTB-4	
IEC	UL
30	30
500	300
0.2-4	AWG28-10
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0
8-10	



STTB-2.5-PV	
IEC	UL
17.5	15
500	300
0.2-2.5	AWG28-12
6/3/ III / I	6/3/ III / I
PA66/V0	PA66/V0
8-10	

主要参数	
技术参数 Technical data	
额定电流 (A) Rated current	-
额定电压 (V) Rated voltage	-
额定截面积 Rated cross-section	0.2-1.5
额定冲击电压 (KV) 污染等级 / 过压等级 / 材料级别 Rared impulse withstand voltage/pollution severity	8/3/ III / I
绝缘材料 / 阻燃等级根据标准 UL94 认证 Insulating material/ul94fammability rating material	PA66/V0
剥线长度 (mm) Wire striping length	8-10

ST-1.5PE	
IEC	UL
-	-
-	-
0.2-1.5	AWG26-14
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0
8-10	

ST-2.5PE	
IEC	UL
-	-
-	-
0.2-2.5	AWG28-10
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0
8-10	

基础参数	
尺寸图 Size chart	

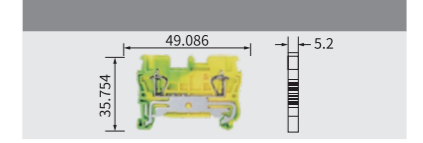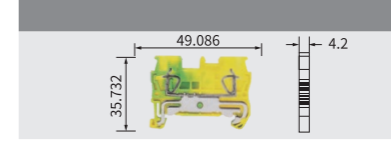

多动颜色可选 Customized color

- 常规


- 常规

Din rail terminal blocks


2.5mm²




2.5mm²

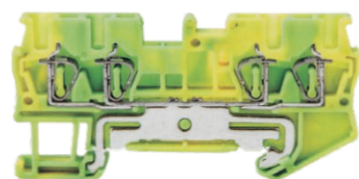

4mm²




6mm²



10mm²



10mm²

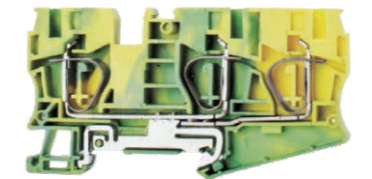

ST-2.5/3PE	
IEC	UL
-	-
0.2-2.5	AWG28-12
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0
8-10	







ST-2.5/4PE	
IEC	UL
-	-
0.2-2.5	AWG28-12
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0
8-10	

ST-4PE	
IEC	UL
-	-
0.2-4	AWG28-10
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0
8-10	

ST-6/3PE	
IEC	UL
-	-
1-6	AWG20-8
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0
8-10	

ST-10PE	
IEC	UL
-	-
1.5-10	AWG16-6
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0
8-10	

ST-10/3PE	
IEC	UL
-	-
10-2.5	AWG24-14
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0
8-10	

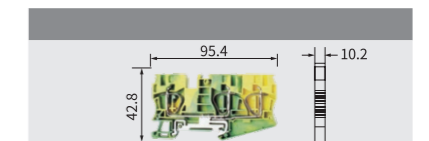

● 常规

● 常规


● 常规

● 常规

● 常规

● 常规


4mm²



4mm²



6mm²




4mm²



4mm²



6mm²



ST-4/3PE	
IEC	UL
-	-
0.2-4	AWG28-10
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0
8-10	







ST-4/4PE	
IEC	UL
-	-
0.2-4	AWG28-10
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0
8-10	

ST-6PE	
IEC	UL
-	-
1-6	AWG20-8
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0
8-10	

ST-4/3PE	
IEC	UL
-	-
0.2-4	AWG28-10
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0
8-10	

ST-4/4PE	
IEC	UL
-	-
0.2-4	AWG28-10
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0
8-10	

ST-6PE	
IEC	UL
-	-
1-6	AWG20-8
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0
8-10	

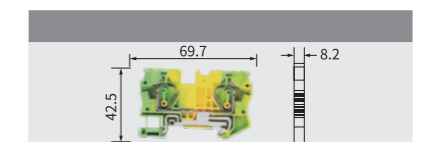

● 常规

● 常规

● 常规


● 常规

● 常规

● 常规


Din rail terminal blocks

6mm²




ST-6/3PE	
IEC	UL
-	-
1-6	AWG20-8
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0
8-10	
基础参数	
● 常规	

10mm²



ST-10PE	
IEC	UL
-	-
1.5-10	AWG16-6
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0
8-10	
基础参数	
● 常规	

10mm²



ST-10/3PE	
IEC	UL
-	-
10-2.5	AWG24-14
8/3/ III / I	8/3/ III / I
PA66/V0	PA66/V0
8-10	
基础参数	
● 常规	

2.5mm²



STTB2.5PE	
IEC	UL
-	-
0.2-2.5	AWG28-12
6/3/ III / I	6/3/ III / I
PA66/V0	PA66/V0
8-10	
基础参数	
● 常规	


弹簧端子系列附件

规格	端子型号	挡板	标记条	连接件	固定件
1.5 平方2 通道	JST-1.5 JST-1.5PE	D-ST-1.5/2.5 	 ZB4	 FBS2-4 FBS3-4 FBS10-4	
3 通道	JST-1.5/3 JST-1.5/3PE	D-ST-1.5/2.5/3 	 ZB4		
4 通道	JST-1.5/4	D-ST-1.5/2.5/4 			
双层	JSTTB-1.5	D-ST-2.5/2/2 			
2.5 平方2 通道	JST-2.5 JST-2.5PE	D-ST-1.5/2.5 	 ZB5		
3 通道	JST-2.5/3 JST-2.5/3PE	D-ST-1.5/2.5/3 	 ZB5	 FBS2-5 FBS3-5	
4 通道	JST-2.5/4 JST-2.5/4PE	D-ST-1.5/2.5/4 			
双层	JSTTB-2.5 JSTTB-2.5PE JSTTB-2.5-PV JSTTB-2.5-DIO	D-ST-2.5/2/2 	 ZB5F	 FBS5-5 FBS10-5	
斜面 3 通道	JST-2.5/3X	D-ST-2.5/3X 	 ZB5		
4 平方2 通道	JST-4 JST-4PE	D-ST-4 	 ZB6	 FBS2-6 FBS3-6 FBS5-6	E/UK
3 通道	JST-4/3 JST-4/3PE	D-ST-4/3 			
4 通道	JST-4/4 JST-4/4PE	D-ST-4/4 		 FBS10-6	
双层	JSTTB-4	D-ST-4/2/2 			
6 平方2 通道	JST-6 JST-6PE	D-ST-6 	 ZB8	 FBS2-8 FBS3-8	
6 平方 3 通道	JST-6/3 JST-6/3PE	D-ST-6/3 		 FBS10-8	
10 平方2 通道	JST-10 JST-10PE	D-ST-10 			
10 平方 3 通道	JST-10/3	D-ST-10/3 	 ZB10	 FBS2-10	
16 平方2 通道	JST-16	D-ST-16 			
32 平方2 通道	JST-35	侧面封闭不需挡板			


Nylon Cable Gland

PG T PG 型尼龙线缆接头

ELECTRICAL PARTS SERIES
电器配件系列

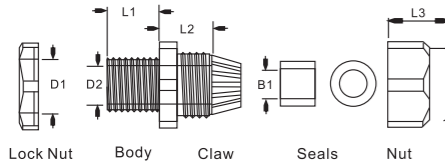

M Type Nylon Cable Gland (Metric) M 型尼龙线缆接头(公制)



Copper Cable Gland 铜线缆接头



Model	D1	D2	L1	L2	L3	B1	Cable range (mm)
PG-07	10.9	8.1	10.4	14.5	10.5	6.4	3.5-6
PG-09	15.3	12.2	9.9	15.8	17.2	8.6	4-8
PG-11	17.9	14.6	10.6	15.5	17.5	10.7	5-10
PG-13.5	20.2	16.2	10.3	17.8	17.9	13.3	6-12
PG-16	21.3	18.3	11.2	18.5	20.5	14.3	10-14
PG-19	24.7	20.5	11.4	18.6	21.8	15.5	12-15
PG-21	26.9	21.8	11.6	18.7	23.1	16.7	13-18
PG-24	29.8	25.0	12.1	28.3	24.1	19.2	15-22
PG-29	35.1	29.8	12.4	22.6	24.8	24.8	18-25
PG-36	44.7	37.1	12.6	25.1	26.1	30.7	22-32
PG-42	50.4	43.3	17.3	25.9	30.5	35.6	30-38
PG-48	56.1	48.2	20.9	28.1	31.5	41.4	34-44

Model	Threaded entry metric	Thread O.D.C1	Thread length C2	Lock nut A	Cable range (mm)
M-12	M12×1.5	12	8	16	3-6.5
M-16	M16×1.5	16	8	19	4-8
M-18	M18×1.5	18	8	22	5-10
M-20	M20×1.5	20	10	24	6-12
M-22	M22×1.5	22	10	27	10-14
M-24	M24×1.5	24	10	27	12-16
M-25	M25×1.5	25	10	33	13-18
M-27	M27×1.5	27	10	33	13-18
M-30	M30×1.5	30	11	35	16-21
M-32	M32×1.5	32	11	35	16-21
M-36	M36×1.5	36	12	42	18-25
M-40	M40×1.5	40	14	52	22-32
M-50	M50×1.5	50	14	60	32-38
M-63	M63×1.5	63	15	64	37-44
M-71	M71×1.5	71	28	77	42-50

Model	Model No.	Model No.	Model No.	Cable range (mm)
M12×1.5	PG7	NPT1/4	G 1/4	3-6
M16×1.5	PG9	NPT3/8	G3/8	4-8
M18×1.5	PG11			5-10
M20×1.5	PG13.5	NPT1/2	G1/2	6-12
M22×1.5	PG16			10-14
M24×1.5	PG19			12-15
M25×1.5				12-16
M27×1.5		NPT3/4	G3/4	13-18
M28×1.5	PG21			13-18
M30×1.5				13-18
M32×1.5	PG25			15-22
M33×1.5				15-22
M36×1.5		NPT1	G1	18-25
M37×1.5	PG29			18-25
M40×1.5		NPT1 1/4	G1 1/4	25-31
M47×1.5(2)	PG36			25-33
M48×1.5(2)				25-33
M50×1.5(2)		NPT1 1/2	G1 1/2	32-38
M54×1.5(2)	PG42			32-38
M56×1.5(2)				32-38
M60×1.5(2)	PG48	NPT2	G2	37-44
M63×1.5(2)				37-44
M64×1.5(2)				37-44
M70×1.5(2)		NPT2 1/2	G2 1/2	42-52
M71×1.5(2)	PG63			42-52
M72×1.5(2)				42-52
M80×1.5(2)				55-62
M88×1.5(2)		NPT3	G3	65-70
M90×1.5(2)				65-70
M100×1.5(2)				75-85

<h4>Cut Out Fuse Box 胶木接线盒</h4>	<h4>DMC Material Terminal Box - IP68 DMC 接线盒 - IP68</h4>	<h4>Aluminum Rotary Switch Box 铝旋转开关盒</h4>																																																												
<h4>GMQ Series Din Rail GMQ 系列导轨</h4> <p>Length : 1 meter / 2 meter Thickness: 0.9/1.0/1.1/1.2/1.5mm</p> <table border="1"> <thead> <tr> <th>Model</th> <th>Rate</th> <th>Poles No</th> <th>Length</th> </tr> </thead> <tbody> <tr><td>GMU-1P</td><td>63A</td><td>56×1</td><td>1M</td></tr> <tr><td>GMU-2P</td><td>63A</td><td>27×2</td><td>1M</td></tr> <tr><td>GMU-3P</td><td>63A</td><td>18×3</td><td>1M</td></tr> <tr><td>GMU-4P</td><td>63A</td><td>14×4</td><td>1M</td></tr> </tbody> </table>	Model	Rate	Poles No	Length	GMU-1P	63A	56×1	1M	GMU-2P	63A	27×2	1M	GMU-3P	63A	18×3	1M	GMU-4P	63A	14×4	1M	<h4>U Type Bus Bar U型汇流排</h4> <table border="1"> <thead> <tr> <th>Model</th> <th>Rate</th> <th>Poles No</th> <th>Length</th> </tr> </thead> <tbody> <tr><td>GMP-1P</td><td>63A</td><td>56×1</td><td>1M</td></tr> <tr><td>GMP-2P</td><td>63A</td><td>27×2</td><td>1M</td></tr> <tr><td>GMP-3P</td><td>63A</td><td>18×3</td><td>1M</td></tr> <tr><td>GMP-4P</td><td>63A</td><td>14×4</td><td>1M</td></tr> </tbody> </table>	Model	Rate	Poles No	Length	GMP-1P	63A	56×1	1M	GMP-2P	63A	27×2	1M	GMP-3P	63A	18×3	1M	GMP-4P	63A	14×4	1M	<h4>Pin Type Bus Bar 针型汇流排</h4> <table border="1"> <thead> <tr> <th>Model</th> <th>Rate</th> <th>Poles No</th> <th>Length</th> </tr> </thead> <tbody> <tr><td>GMP-1P</td><td>63A</td><td>56×1</td><td>1M</td></tr> <tr><td>GMP-2P</td><td>63A</td><td>27×2</td><td>1M</td></tr> <tr><td>GMP-3P</td><td>63A</td><td>18×3</td><td>1M</td></tr> <tr><td>GMP-4P</td><td>63A</td><td>14×4</td><td>1M</td></tr> </tbody> </table>	Model	Rate	Poles No	Length	GMP-1P	63A	56×1	1M	GMP-2P	63A	27×2	1M	GMP-3P	63A	18×3	1M	GMP-4P	63A	14×4	1M
Model	Rate	Poles No	Length																																																											
GMU-1P	63A	56×1	1M																																																											
GMU-2P	63A	27×2	1M																																																											
GMU-3P	63A	18×3	1M																																																											
GMU-4P	63A	14×4	1M																																																											
Model	Rate	Poles No	Length																																																											
GMP-1P	63A	56×1	1M																																																											
GMP-2P	63A	27×2	1M																																																											
GMP-3P	63A	18×3	1M																																																											
GMP-4P	63A	14×4	1M																																																											
Model	Rate	Poles No	Length																																																											
GMP-1P	63A	56×1	1M																																																											
GMP-2P	63A	27×2	1M																																																											
GMP-3P	63A	18×3	1M																																																											
GMP-4P	63A	14×4	1M																																																											
<h4>Butterfly Expansion Pipe 蝴蝶膨胀管</h4>	<h4>Butterfly Expansion Pipe 蝴蝶膨胀管</h4>	<h4>GMX Series Expand Plugs GMX 系列膨胀管</h4>																																																												

GCP Series Nail Cable Clips GCP 系列钢钉线卡


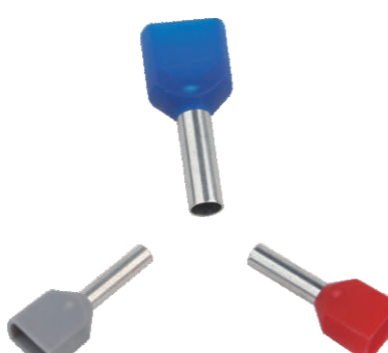
Model	Pcs/Box	Boxes/Ctn
GCP-4mm	100 Pcs	250 Boxes
GCP-5mm	100 Pcs	250 Boxes
GCP-6mm	100 Pcs	200 Boxes
GCP-7mm	100 Pcs	200 Boxes
GCP-8mm	100 Pcs	200 Boxes
GCP-9mm	100 Pcs	100 Boxes
GCP-10mm	100 Pcs	100 Boxes
GCP-12mm	100 Pcs	100 Boxes
GCP-14mm	100 Pcs	100 Boxes
GCP-16mm	100 Pcs	50 Boxes
GCP-18mm	100 Pcs	50 Boxes
GCP-20mm	100 Pcs	50 Boxes
GCP-21mm	100 Pcs	50 Boxes
GCP-22mm	100 Pcs	50 Boxes
GCP-25mm	80 Pcs	50 Boxes

Insulated Terminals Series

电器配件系列

ELECTRICAL PARTS SERIES

预绝缘端头系列

Insulated Cord End Terminal 管形预绝缘端头	Cord End Terminals (Double Wire) 双线管形预绝缘端头
	
E0506 E4009 E0508 E4012 E0510 E4018 E7506 E6012 E7508 E6018 E7510 E10-12 E7512 E10-18 E1006 E16-12 E1008 E16-18 E1010 E25-16 E1012 E25-22 E1508 E35-16 E1510 E35-25 E1518 E50-20 E2508 E50-25 E2512 E70-20 E2518 E70-25	TE0508 TE7508 TE7510 TE1008 TE1010 TE1508 TE1512 TE2510 TE2513 TE4012 TE6014 TE10-14 TE16-14

Round Pre-insulating Terminal 圆形预绝缘端头












Size of cable: 0.5-1.5mm ² (American standard 22-16) Max.Current=19A	Size of cable: 0.5-1.5mm ² (American standard 16-14) Max.Current=27A	Size of cable: 2.5-4mm ² (American standard 14-12) Max.Current=37A	Size of cable: 4-6mm ² (American standard 12-10) Max.Current=48A
RV1.25-3.2	RV2-3.2	RV3.5-4	RV5.5-3.7
RV1.25-3.7S	RV2-3.7S	RV3.5-5S	RV5.5-4
RV1.25-3.7M	RV2-3.7M	RV3.5-5L	RV5.5-4
RV1.25-3.7L	RV2-3.7L	RV3.5-6	RV5.5-5
RV1.25-4S	RV2-4S		RV5.5-6
RV1.25-4L	RV2-4L		RV5.5-8
RV1.25-5	RV2-5S		RV5.5-10
RV1.25-6	RV2-5L		RV5.5-12
RV1.25-8	RV2-6		
RV1.25-10	RV2-8		
	RV2-10		

Fork Pre-insulating Terminal 叉形预绝缘端头



Size of cable: 0.5-1.5mm ² (American standard 22-16) Max.Current=19A	Size of cable: 0.5-1.5mm ² (American standard 16-14) Max.Current=27A	Size of cable: 2.5-4mm ² (American standard 14-12) Max.Current=37A	Size of cable: 4-6mm ² (American standard 12-10) Max.Current=48A
SV1.25-3.2	SV2-3.2	SV3.5-4	SV5.5-3.5
SV1.25-3.7S	SV2-3.7S	SV3.5-5	SV5.5-4S
SV1.25-3.7L	SV2-3.7L	SV3.5-6	SV5.5-4L
SV1.25-4S	SV2-4S		SV5.5-5
SV1.25-4M	SV2-4M		SV5.5-6S
SV1.25-4L	SV2-4L		SV5.5-6L
SV1.25-5S	SV2-5S		SV5.5-8
SV1.25-5L	SV2-5L		
SV1.25-6S	SV2-6S		
SV1.25-6L	SV2-6L		

Non-Insulated Spade Terminal 叉形裸端头	Piggy Back Disconnectors 肩背形公母预绝缘端头	Insulated Male Terminals 公预绝缘端头
		
SNB 1.25-3 SNBL 1.24-4 SNBS 1.25-3.5 SNBS 1.25-5 SNBL 1.25-3.5 SNBL 1.25-5 SNBM 1.25-4 SNBS 1.25-6 SNBS 1.25-4 SNBL 1.25-6	PBDD 1.25-250 PBDD 2-250 PBDD 5.5-250	MDD 1.25-110(8) MDD 2-187(5) MDD 1.25-187(5) MDD 2-187(8) MDD 1.25-187(8) MDD 2-250 MDD 1.25-250 MDD 5.5-250
Long Full-insulating Middle Joint 长形全绝缘中间接头	Bullet Insulated Connectors 子弹形公预绝缘端头	Fully Insulated Connectors 母全绝缘端头
		
BV 1.25 BV 14 BV 2 BV 22 BV 5.5 BV 38 BV 8	MPD 1.25-156 MPD 2-156 MPD 2-195 MPD 5.5-195	FDFD 1.25-187(5) FDFD 2-187(5) FDFD 1.25-187(8) FDFD 2-187(8) FDFD 1.25-250 FDFD 2-250 FDFD 5.5-250
Insulated Female Terminals 母预绝缘端头	Bullet Insulated Female Connectors 子弹形母全绝缘端头	Non-Insulated Ping Terminal 圆形裸端头
		
FDD 1.25-110(5) FDD 2-110(5) FDD 1.25-110(8) FDD 2-110(8) FDD 1.25-187(5) FDD 2-187(5) FDD 1.25-187(8) FDD 2-187(8) FDD 1.25-205 FDD 2-205 FDD 1.25-250 FDD 2-250 FDD 2-312 FDD 5.5-250 FDD 5.5-375	FRD 1.25-156 FRD 5.5-195 FRD 2-156 FRD 2-195	RNB 8-4 RNB 8-8 RNB 8-5 RNB 8-8 RNB 8-5 RNB 8-10 RNB 8-6 RNB 8-12

Packing Style 包装样式



ELECTRICAL PARTS SERIES

Compact Splicing Connectors

紧凑型快速连接器

CM-222

Cage Spring Terminal Block
笼式弹簧接线端子

For hard wire and flexible wire 软硬线通用



21 Series Regular Type 21系列常规款

接线范围/Wire Range: 硬线/Hard Wire: 0.08-4.0mm ² AWG28-12 软线/Flexible Wire: 0.08-2.5mm ² AWG28-14		电压/Voltage: 250V 电流/Current: 32A 材质/Material: PA66		 9-10mm/0.39in
Size:(LxWxH) 12.5x21x14.4mm	Size:(LxWxH) 17.1x21x14.4mm	Size:(LxWxH) 21.7x21x14.4mm	Size:(LxWxH) 26.3x21x14.4mm	Size:(LxWxH) 40.6x21x14.4mm

Compact Splicing Connectors

紧凑型快速连接器

CM-221

Cage Spring Terminal Block
笼式弹簧接线端子

For hard wire and flexible wire 软硬线通用



41 Series 41系列

接线范围/Wire Range: 硬线/Hard Wire: 0.2-4.0mm ² 软线/Flexible Wire: 0.14-4.0mm ²		电压/Voltage: 450V 电流/Current: 32A 材质/Material: PC		 9-10mm/0.39in
Size:(LxWxH) 13x19.4x9.6MM	Size:(LxWxH) 18.6x19.4x9.6MM	Size:(LxWxH) 24.2x19.4x9.6MM	Size:(LxWxH) 29.8x19.4x9.6MM	

* PCT 2-2 series products are suitable for wiring junction boxes and lighting appliances, etc.

* The PCT 2-2 series connector with compact cage spring connection technology can connect multiple thin wires from 0.08mm² to 4mm² and hard wires less than or equal to 2.5mm², without any tools for operation.

* PCT-2系列产品适用于接线盒以及照明器具等的接线。

* 应用了紧凑型笼式弹簧连接技术的PCT-2系列连接器可连接0.08mm²至4mm²的多股细导线及小于等于2.5mm²的硬导线，操作无需使用任何工具。

Both side in line Series 双边进线系列

接线范围/Wire Range: 硬线/Hard Wire: 0.08-4.0mm ² AWG28-12 软线/Flexible Wire: 0.08-2.5mm ² AWG28-14		电压/Voltage: 250V 电流/Current: 32A 材质/Material: PA66		 9-10mm/0.39in
PCT-2-2 / PCT-2-2H Size: (LxWxH) 13.6x40.3x14.5mm	PCT-2-3 / PCT-2-3H Size: (LxWxH) 18.9x39.2x14.6mm	PCT-2-4 Size: (LxWxH) 23.6x40.3x14.5 mm	PCT-2-5 Size:(LxWxH) 28.6x40.3x14.5mm	


Both side in line Series 双边进线系列

接线范围/Wire Range: 硬线/Hard Wire: 0.08-4.0mm ² AWG28-12 软线/Flexible Wire: 0.08-2.5mm ² AWG28-14		电压/Voltage: 250V 电流/Current: 32A 材质/Material: PA66		 9-10mm/0.39in
PCT-2-2 C Size:(LxWxH) 13.6x40.3x14.5mm	PCT-2-3 C Size:(LxWxH) 18.9x39.2x14.6mm	PCT-2-4 C Size:(LxWxH) 23.6x40.3x14.5mm	PCT-2-5 C Size:(LxWxH) 28.6x40.3x14.5mm	

Din Rail Terminal Block: PCT-211 can replace UK series, Screwless design

轨道式接线端子：PCT-211可代替UK系列，免螺丝设计

PCT-211 Size: 48x30.6x8mm	接线范围/Wire Range:	电压/Voltage: 400V	 9-10mm/0.39in
	硬线/Hard Wire: 0.08-4.0mm ² AWG28-12	电流/Current: 32A	
	软线/Flexible Wire: 0.08-2.5mm ² AWG28-14	材质/Material: Nylon/PC	



锁上螺丝可实现并联，一进多出
Lock the screws can achieve parallel connection, one line in and more out.

不锁上螺丝，孔与孔之间相互独立，一进一出
Do not lock the screw, the holes and holes are independent of each other, one line in and one out.


可添加橡胶键用数字可快速区分线
Rubber buttons can be added to quickly distinguish lines with numbers.

Hard Wire 6mm² 硬线6mm²

接线范围/Wire Range: 硬线/Hard Wire: 2.5-6mm ² AWG14-10	电压/Voltage: 400V 电流/Current: 41A 材质/Material: PC	 12mm/0.47in
 PCT-103D Size: 25.8x20.2x14.3mm	 PCT-104D Size: 33.8x20.2x14.3mm	

Plug-in Terminal Block

* PCT-10/20 Series compact splicing connectors are used for junction box and lighting applications, etc.
* The wire area are ranges from 0.75 to 2.5mm². The insert part doesn't need to peel off the insulating layer, which is very easy to operate and also save much time.



* PCT-10/20系列产品适用于接线盒以及照明器具等的接线。
* 导线面积从0.75mm²到2.5mm²不等，可保障高性能的连接。连接头(插入口)不需要剥离绝缘层，操作简单、节省时间。

CM-2273

插拔式接线端子 For hard wire and flexible wire 软硬线通用		20 Series 20系列	
接线范围/Wire Range: 硬线/Hard Wire: 0.5-2.5mm ²	电压/Voltage: 450V 电流/Current: 24A 材质/Material: PC	 11mm/0.47in	
 Size: 9.8x16.35x5.4MM	 Size: 13.8x16.35x5.4MM	 Size: 17.8x16.35x5.4MM	 Size: 21.8x16.35x5.4MM

CM-773

Plug-in Terminal Block For Hard Wire 硬线专用		10 Series 10系列	
接线范围/Wire Range: 硬线/Hard Wire: 0.75-2.5mm ² AWG18-14	电压/Voltage: 400V 电流/Current: 24A 材质/Material: PC	 12mm/0.47in	
 PCT-102 Size: 9.3x19.4x13.4mm	 PCT-104 Size: 13x19.4x13.4mm	 PCT-106 Size: 18.6x19.4x13.4mm	 PCT-108 Size: 24.1x19.4x13.4mm

Compact Splicing Connectors

紧凑型快速连接器

Cage Spring Terminal Block
笼式弹簧接线端子

For hard wire and flexible wire 软硬线通用

接线范围/Wire Range: 硬线/Hard Wire: 0.2-4.0mm ² 软线/Flexible Wire: 0.14-4.0mm ²		电压/Voltage: 450V 电流/Current: 32A 材质/Material: PC	
LX-3001 Size:(LxWxH) 36x8.5x9.7MM	LX-3002 Size:(LxWxH) 36x20.5x9.7MM	LX-3003 Size:(LxWxH) 36x32.5x9.7MM	LX-3004 Size:(LxWxH) 36x44.5x9.7MM
LX-3005 Size:(LxWxH) 36x56.5x9.7MM	LX-3006 Size:(LxWxH) 36x68.5x9.7MM	LX-3007 Size:(LxWxH) 36x80.5x9.7MM	LX-3008 Size:(LxWxH) 36x92.5x9.7MM
LX-3009 Size:(LxWxH) 13x104.5x9.6MM	LX-3010 Size:(LxWxH) 18.6x116.5x9.6MM	LX-3011 Size:(LxWxH) 24.2x128.5x9.6MM	LX-3012 Size:(LxWxH) 29.8x140.5x9.6MM

Compact Splicing Connectors

紧凑型快速连接器


Cage Spring Terminal Block
笼式弹簧接线端子

For hard wire and flexible wire 软硬线通用


接线范围/Wire Range: 硬线/Hard Wire: 0.2-4.0mm ² 软线/Flexible Wire: 0.14-4.0mm ²		电压/Voltage: 450V 电流/Current: 32A 材质/Material: PC	
LX-12 Size:(LxWxH) 13x19.4x9.6MM	LX-13 Size:(LxWxH) 18.6x19.4x9.6MM	LX-14 Size:(LxWxH) 24.2x19.4x9.6MM	LX-15 Size:(LxWxH) 29.8x19.4x9.6MM
LX-42 Size:(LxWxH) 13x19.4x9.6MM	LX-62 Size:(LxWxH) 18.6x19.4x9.6MM	LX-82 Size:(LxWxH) 24.2x19.4x9.6MM	LX-63 Size:(LxWxH) 29.8x19.4x9.6MM
LX-93 Size:(LxWxH) 13x19.4x9.6MM	LX-84 Size:(LxWxH) 18.6x19.4x9.6MM	CH-2 Size:(LxWxH) 17*19*13MM	CH-3 Size:(LxWxH) 27*19*13MM

Terminal blocks


接线端子

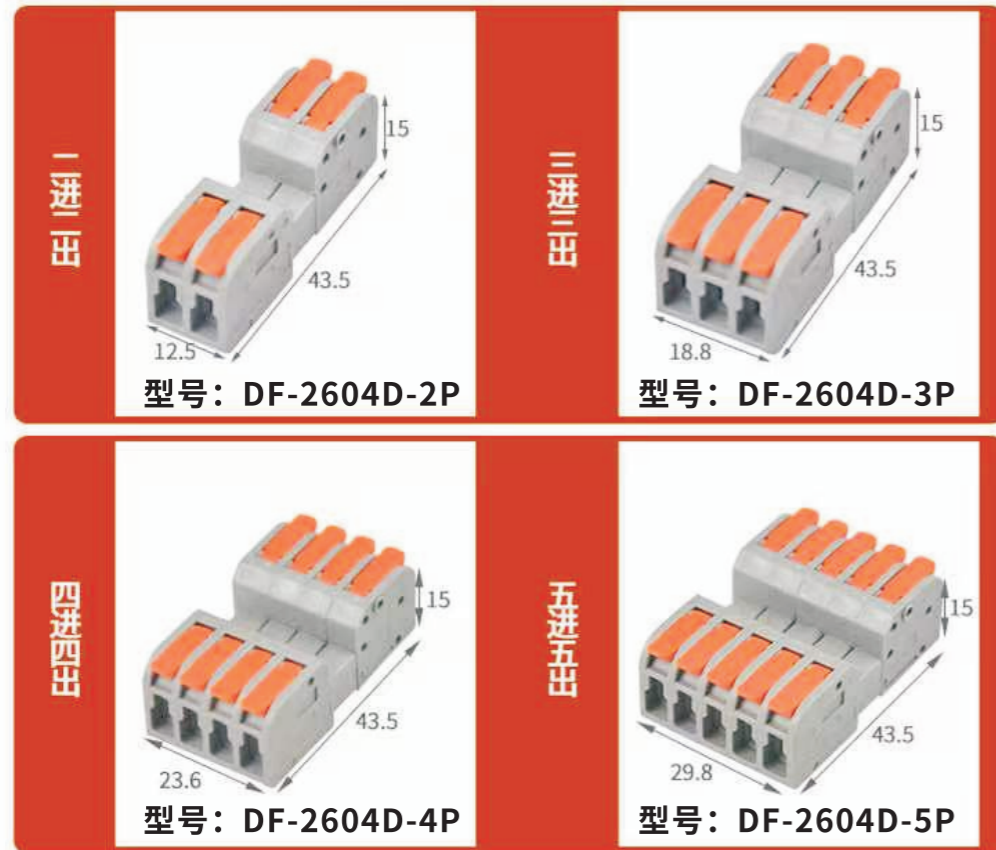

连接器接线演示

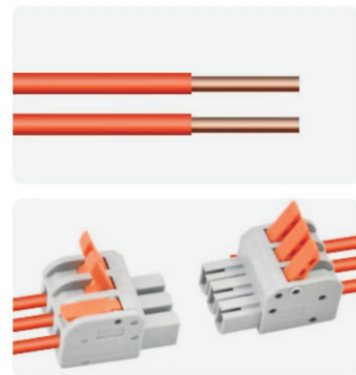

步骤1
剥去导线外皮，约10mm左右。

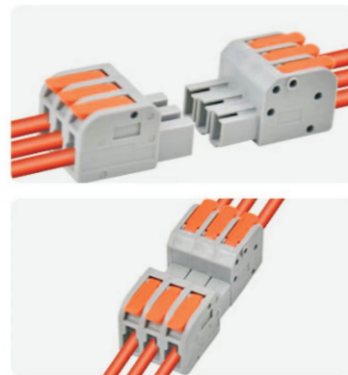

步骤2
推开助推器，将电线插入接线孔。(如需接硬导线，不需要推开助推器，即可接线。) 注:被剥线部位插到底，不能裸露在外面。

步骤3
用手按下助推器即可完成接线。
注:拆卸时，向上打开助推器即可拔出电线。(硬导线旋转即可拔出电线)

步骤4
将端子对插，即可完成接线。

CM-238	CM-238-B-D
P=10.0mm 2~5 Poles	P=10.0mm 2~5 Poles
450V/24A 450V/24A 600V/16A	450V/24A 450V/24A 600V/16A

CM-238-T	CM-238-J
P=10.0mm 2~5 Poles	P=10.0mm 2~5 Poles
450V/24A 450V/24A 600V/16A	450V/24A 450V/24A 600V/16A

Waterproof Connectors

快速接线系列 Screw-less Connector Series

EW-P20 13	EW-P25 14
EW-M25B 15	EW-P20T 16
EW-P20T 17	EW-P25T 18
EW-P20X 19	EW-P25X 20
EW-RJ45 21	EW-RJ45 22

公母对插系列 Male & Female Self-Locking Connector Series

EW-M15 25	EW-M19 26
EW-M23 27	EW-M28 28
EW-P23 29	EW-P25 30

面板系列 Panel Mount Connector Series

EW-M19 33/34	EW-M23 35/36
EW-M28 37/38	EW-M15 39
EW-L02/L03 40	EW-B02 41
EW-M15 42	EW-M19 43
EW-M23 44	EW-P23 45
EW-P25 46	EW-M28 47

锁线系列 Screw Connector Series

EW-M16 51	EW-M20 52
EW-M25 53	EW-M25I 54

EW-M25 55	EW-M20T 56
EW-M25T 57	EW-M25TC 58
EW-M25Y 59	EW-M20X 60
EW-M25X 61	

防水盒系列 Waterproof Junction Box Series

EW-M2068-2T 65	EW-M2068-3T 66
EW-M2068-4TA 67	EW-M2068-4TB 68
EW-M2068-5T 69	EW-M2068-6T 70
EW-M2068(L)-H 71	EW-M2068(L)-T 72

EW-M2068(L)-Y 73	EW-M2068(XL)4T 74
EW-M2068(XL)10T 75	EW-M2068(XL) 76
EW-M2068S-2T 77	EW-M2068S-3T 78
EW-M2068S-4TA 79	EW-M2068S-4TB 80
EW-M2068S-5T 81	EW-M2068S-6T 82

接线端子系列 Push Wire Connector Series

	83

电缆接头系列 Cable Gland Series