





# 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD

产品规格书  
THE SPEC SHEET



SECTION: A-A

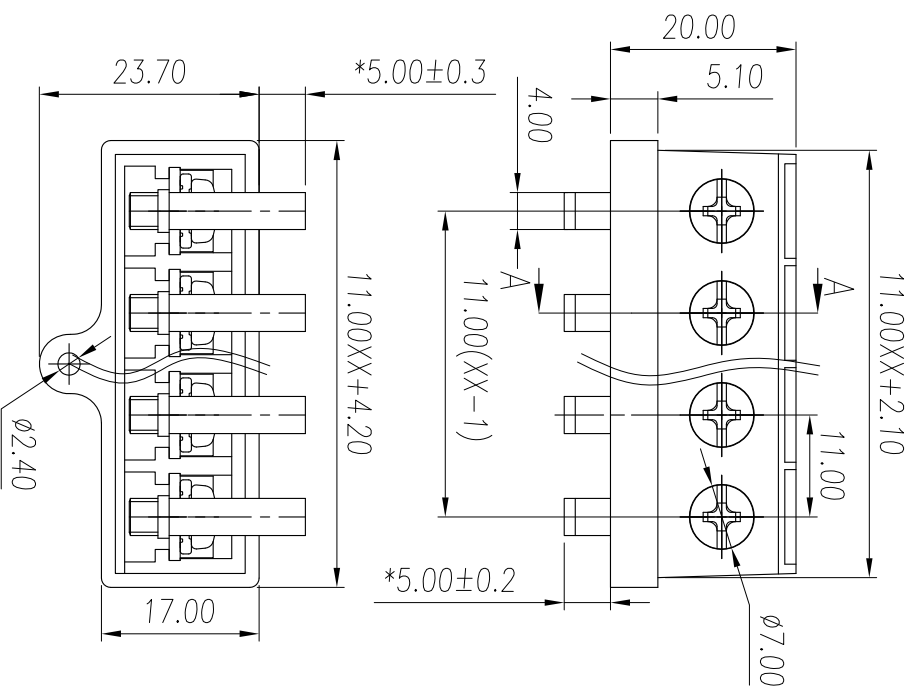

- 参考标准 / Standard: UL
  - 额定电压 / Rated voltage: 150V, 250V
  - 额定电流 / Rated current: 20A, 24A
  - 接触电阻 / Contact resistance: 20mΩ
  - 绝缘电阻 / Insulation resistance: 500MΩ / DC:500V
  - 使用线径 / Wire range: 22-12AWG(U/L)
  - 耐电压 / With standing voltage: AC 2000V/1 Min
  - 机械性能 / Mechanical: 2.5mm<sup>2</sup>(IEC)
  - 最大扭矩 / Torque(Max): 1.2Nm(10.8lb.in)
  - 瞬时温度 / MAX Soldering: +250°C for 5 Sec
  - 温度范围 / Temp Range: -40°C~+105°C
- 尺寸 / Dimensions: 11mm
- 间距 / Pitch: 11mm
- 极数 / Poles: 3-4p
- 材料及电镀 / Material: PA66
- 塑料 / Housing: M4 Steel, imitation gold plated
- 螺丝 / Screws: Brass, imitation gold plated
- 焊针 / Pin header:

linear dimension(Tolerances Standard GB/T 14486-2008)	≡	—	□	//	⊥											
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06	0.12	0.4
variable range	6 to 10	6 to 10	10 to 18	18 to 30	30 to 50	50 to 80	80 to 120	120 to 160	160 to 200	200 to 250	250 to 250	all	5 to 5	5 to 30	30 to 120	120 to 120

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1
名称 / TITLE	第三视图 / THIRD ANGLE PROJECTION				
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD					EM-2H-XXP-1YY-00B