

HF9319

1/2 CRYSTAL CAN 4 FORM C
HERMETICALLY SEALED ELECTRO MAGNETIC RELAY



Features

- 4 form C
- Load can be 2A 28Vd.c.
- High ambient applicability
- All metal welded construction
- Hermetically welded and marked by laser

Conform to GJB65B-99 (Equivalent to MIL-PRF-39016)

AMBIENT ADAPTABILITY

Ambient grade	I	II	III
Ambient temperature	-55 °C to 85 °C	-55 °C to 85 °C	-65 °C to 125 °C
Humidity			98 %, 40 °C
Low air pressure	58.53 kPa	4.39 kPa	4.39 kPa
Sine vibration	Frequency	10 Hz to 500 Hz	10 Hz to 1000 Hz
	Acceleration	98 m/s ²	147 m/s ²
Shock resistance		490 m/s ²	490 m/s ²
Random vibration		—	10 (m/s ²) ² /Hz
Steady-state acceleration		490 m/s ²	490 m/s ²
			735 m/s ²
			20 (m/s ²) ² /Hz
			735 m/s ²

CONTACT DATA

Ambient grade	I	II	III
Arrangement			4 C
Contact resistance	Initial max.		50 mΩ
	After life max.		150 mΩ

Contact ratings

Ambient grade	Contact load	Type	Electrical life min.
I	2 A 28 Vd.c.	Resistive	2 x 10 ⁴ OPS
II	2 A 28 Vd.c.	Resistive	5 x 10 ⁴ OPS
	2 A 28 Vd.c.	Resistive	1 x 10 ⁵ OPS
	0.3 A 115 Va.c., 50Hz~400Hz	Resistive	1 x 10 ⁵ OPS
III	0.75 A 28 Vd.c. 200 mH	Inductive	1 x 10 ⁵ OPS
	50 µA 50 mVd.c.	Low level	1 x 10 ⁵ OPS



HONGFA HERMETICALLY SEALED RELAY

SPECIFICATION

Ambient grade	I	II	III
Insulation resistance min.	50 MΩ (@ 500 Vd.c.)	100 MΩ (@ 500 Vd.c.)	1000 MΩ (@ 500 Vd.c.)
Dielectric strength min. (Normal condition)	Between open contacts	350 Vr.m.s.	350 Vr.m.s.
	Between contact & coil	350 Vr.m.s.	350 Vr.m.s.
	Between contact & cover	350 Vr.m.s.	350 Vr.m.s.
	Between contact group	350 Vr.m.s.	350 Vr.m.s.
	Between coil & cover	350 Vr.m.s.	350 Vr.m.s.
Dielectric strength min. (Low air pressure condition)	300 Vr.m.s.	300 Vr.m.s.	350 Vr.m.s.
Leakage rate max.	1 Pa·cm ³ /s	1 × 10 ⁻¹ Pa·cm ³ /s	1 × 10 ⁻³ Pa·cm ³ /s
Operate time max.			5 ms
Release time max.			5 ms
Mounting style		See the mounting dimension	
Terminals		See the terminal styles	
Work position			Random
Weight max.			13 g

COIL DATA

Norminal coil power	Approx.1.2W
---------------------	-------------

Coil Version

Vd.c.

Order Number	Coil voltage		at 25 °C			-65°C to 125°C			
	Nominal voltage	Value max.	Coil resistance (1±10%) Ω	Pick-up voltage max.	Hold voltage max.	Drop-out voltage min.	Pick-up voltage max.	Hold voltage max.	
005	5	6.0	21	3.00	1.65	0.29	4.2	2.4	0.21
006	6	7.5	30	3.60	2.00	0.35	5.1	2.9	0.25
009	9	11.8	68	5.40	3.00	0.52	7.7	4.3	0.38
012	12	15.0	125	7.30	4.00	0.70	10.5	5.8	0.50
024	24	28.8	480	14.80	7.50	1.20	20.8	11.6	0.90
027	27	32.0	600	16.00	8.50	1.50	22.5	14.0	1.00

Notes: We can offer many kinds of coil voltage under the requirement of users.

ORDERING INFORMATION

HF9319

-012

-0

1

- I

Type

Order Number 005、006、009、012、018、027

Mounting Style 0, 1, 2, 3 (See the mounting dimension)




Terminals Style 1 (See " Terminal styles " below)

Ambient Grade I 、 II 、 III


OUTLINE DIMENSIONS AND WIRING DIAGRAM

Unit:mm



Outline Dimension




Mounting style 0

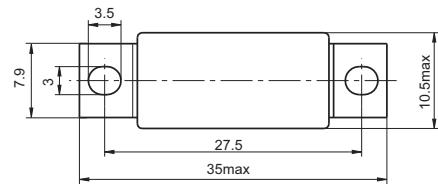


Mounting style 1

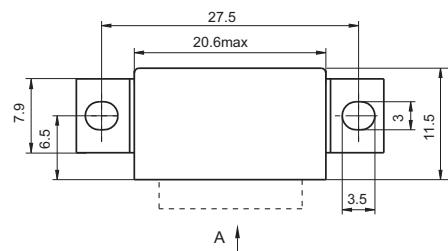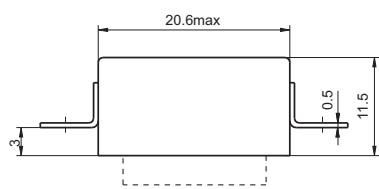


Mounting style 2



Mounting style 3



Terminal style 1
(Solder pin)

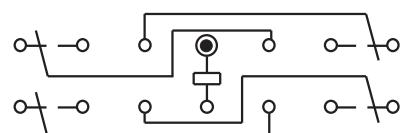

Wiring Diagram
(Bottom View)

Disclaimer

This datasheet is for the customers' reference. All the specifications are subject to change without notice.

© Xiamen Hongfa Hermetically Sealed Relays Co., Ltd. All rights of Hongfa are reserved.