


Part No.	电缆尺寸	规格	安装孔径 A	板厚 B	D	L	H
			±0.25				
LTG-M12	4~7	M12	12.5±0.20	0.5~2.0	20.0	12.8	5.6
LTG-M16	5~9	M16	16.5	1.0~4.0	21.0	17.7	11.0
LTG-M20	8~13	M20	20.5		25.5	20.0	13.4
LTG-M25	11~17	M25	25.5		30.5	21.3	15.3
LTG-M32	15~20	M32	32.5		38.5	24.6	18.6
LTG-M40	20~28	M40	40.5		48.5	29.5	21.7
LTG-M50	27~35	M50	50.5		60.5	34.8	25.0
LTG-PG7	3~5	PG7	13.0	0.5~2.0	20.0	12.6	5.4
LTG-PG9	5~7	PG9	16.0	1.0~4.0	21.0	17.8	10.3
LTG-PG11	7~10	PG11	19.0		24.0	19.8	12.7
LTG-PG16	10~14	PG16	23.0		28.0	21.6	14.7
LTG-PG21	14~20	PG21	29.0		35.0	24.6	17.6
LTG-PG29	20~26	PG29	38.0		46.0	28.5	20.0
LTG-PG36	26~35	PG36	48.0		58.0	34.9	23.9

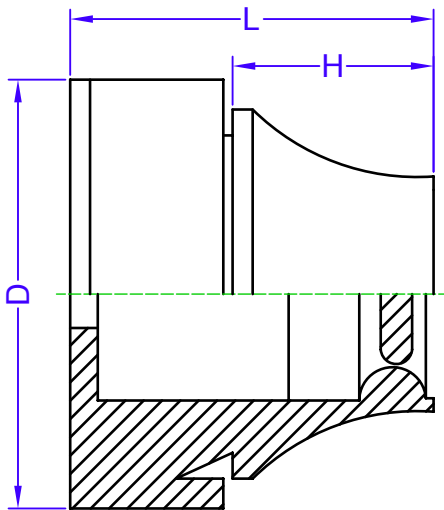

IP67防水防尘电缆密封环塞

材质: EPDM
 操作温度: -40℃ to 85℃
 颜色: 浅灰色, 黑色, 灰白色。
 用途: 防水防尘, 抗化学品, 耐候。

Unit: mm

 上海凯舒电子材料有限公司 Shanghai Kinglok Electrical Material Co., Ltd	产品名称PN	密封环塞	产品料号P/N	LTG-XXX
	比例SCALE		材质Material	EPDM
	设计DESIGNER	ALEX	颜色Color	见标注
	检图CHECKED	Gary	图纸编号NO.	KS100714-2
	制图DRAWN	David	日期DATE	2009-07-14