




慈溪市万捷电子有限公司

CIXI WANJIE ELECTRONIC CO., LTD

产品规格书
product specification

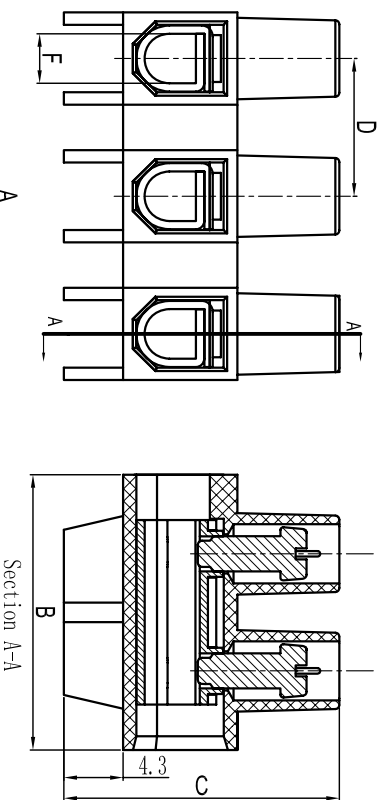


型号 Model	线径 Wire range mm ²	IEC 技术参数 IEC datashheet		UL 技术参数 UL datashheet		尺寸/mm Dimensions							
		电流 Rated Current	电压 Rated Voltage	电流 Rated Current	电压 Rated Voltage	螺丝 Screw	Unit	A	B	C	D	E	F
MV8HS+4.3	0.5-4.0	24A	450V	17.5A	300V	M2.6x5	(mm)	96	17.8	18.6	8.2	Ø3.0	3.0*3.4
MY10HS+4.3	1.0-6.0	41A	450V	26A	300V	M3.0x6	(mm)	116.5	20.3	20.0	10.0	Ø3.2	3.45*4.0

TOLERANCES EXCEPT AS NOTED

	linear dimension				fillet	chamfer	短角 short angle	侧边 side	倒角 chamfer	公差 tolerance
variable range	over 6 to 6	over 30 to 30	over 120 to 120	over 480 to 480	to dll	over 6 to 6	over 10 to 10	over 50 to 50	over 120 to 120	±0.1
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1°	30°

订购方式：
HOW TO ORDER

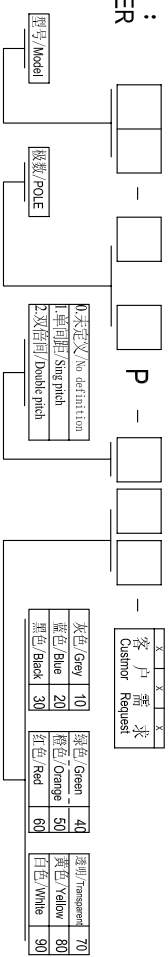

型号/Model: MV HS+4.3

底部/Base: With 4.3mm elevated base

螺丝/Screws: steel Zinc plated

方块/Clamp: Carbon steel Zinc plated

材质/Housing: PA66, UL94V-2

温度范围/Temp Range: -40° C⁻+105° C

接线排数/Poles available: 2-12 poles

单位/UNITS mm 尺寸/SIZE A4 比例/SCALE 2:1

慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

名称/NAME MV HS+4.3-XP-1Y-0A