

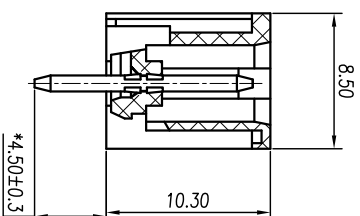


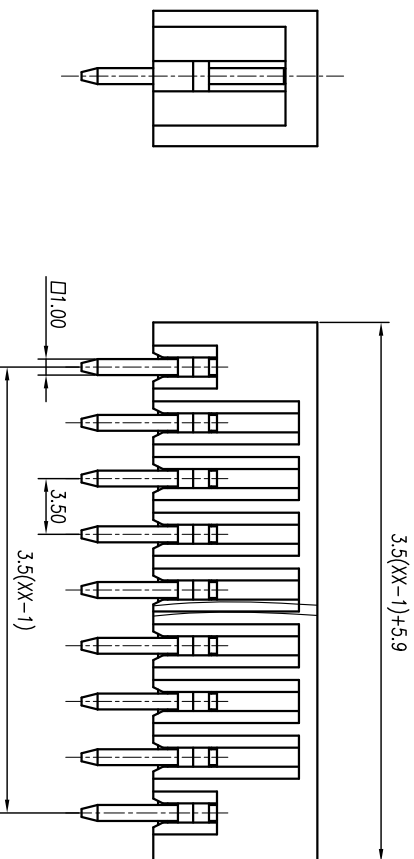

慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD

产品规格书
THE SPEC SHEET

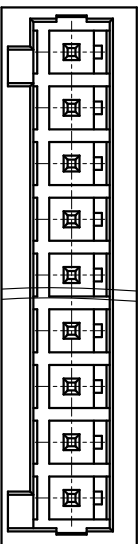

参考标准/Standard	UL	IEC
额定电压/Rated voltage	300V	130V
额定电流/Rated current	10A	00A
接触电阻/Contact resistance	20mΩ	
绝缘电阻/Insulation resistance	500MΩ/DC500V	
耐电压/Wrth standing voltage	AC 2000V/1 Min	
机械性能/Mechanical		
温度范围/Temp Range		-40°C~+105°C
瞬时温度/MAX Soldering		+250°C for 5 Sec
尺寸/Dimensions		
间距/Pitch		3.5mm
极数/Poles		2-24p
材质及电镀/Material		PA66, UL94V-0
塑件/Housing		Brass, Tin plated
焊脚/Pin header		

linear dimension(Tolerances Standard GB/T 14486-2008)	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
	6	10	18	30	50	80	120	160	200	250	all	5	30	120	6	10	18	30	50
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06	0.12	0.4			

单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	2:1
名称/TITLE	WJ0202-01XX-1YY-00A				



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

第三视图 THIRD ANGLE PROJECTION