

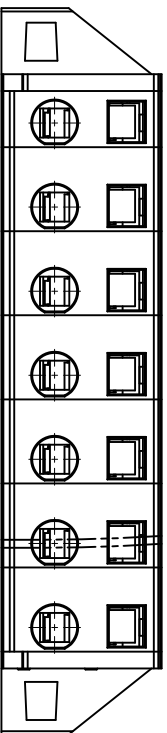
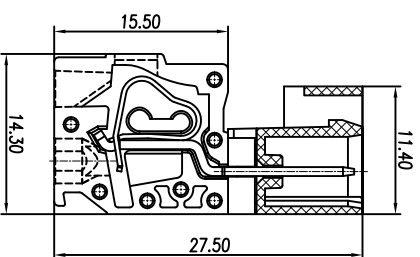
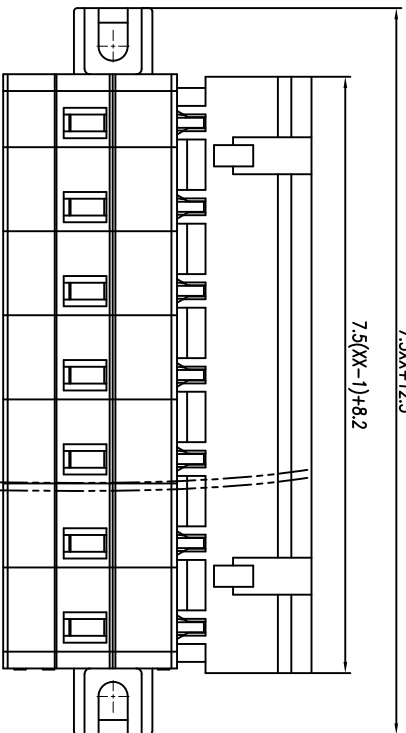




慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD

产品规格书
THE SPEC SHEET

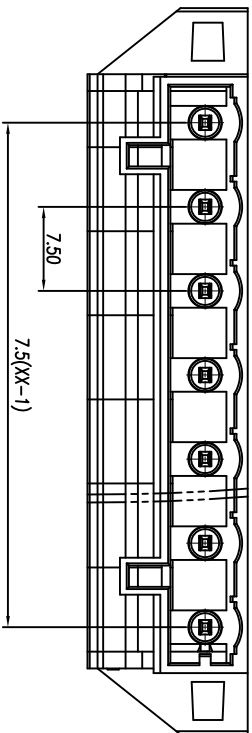

| | | |
|----------------------------|------------------------|--------------------|
| 参考标准/Standard | UL | IEC |
| 额定电压/Rated voltage | 300V | 250V |
| 额定电流/Rated current | 15A | 16A |
| 接触电阻/Contact resistance | 20mΩ | |
| 绝缘电阻/Insulation resistance | 500MΩ/DC500V | |
| 使用线径/Wire range | 28-12AWG | 2.5mm ² |
| 耐电压/Wrth standing voltage | AC 2000V/1 Min | |
| 机械性能/Mechanical | | |
| 剥线长度/Steip Length | 8.9mm | |
| 温度范围/Temp Range | -40°C~+105°C | |
| 尺寸/Dimensions | | |
| 间距/Pitch | 7.5mm | |
| 极数/Poles | 2-24p | |
| 材质及电镀/Material | PA66, UL94V-0 | |
| 塑件/Housing | Stainless steel | |
| 弹片/Wire guard | Red copper, Tin plated | |
| 夹子/Clamp | | |

| | | | | | | | | | | | | | | | | | |
|----------------|---|--------------|---------------|---------------|---------------|---------------|----------------|-----------------|-----------------|-----------------|---------------|----------|--------------|----------------|-----------------|------|-----|
| variable range | tolerance | ±0.1 | ±0.14 | ±0.19 | ±0.25 | ±0.32 | ±0.43 | ±0.57 | ±0.72 | ±0.88 | ±1.05 | ±1.25 | 0.5 | 0.025 | 0.06 | 0.12 | 0.4 |
| | linear dimension(Tolerances Standard GB/T 14486-2008) | over 6 to 10 | over 10 to 18 | over 18 to 30 | over 30 to 50 | over 50 to 80 | over 80 to 120 | over 120 to 160 | over 160 to 200 | over 200 to 250 | over 250 to 5 | all to 5 | over 5 to 30 | over 30 to 120 | over 120 to 120 | | |

| | | | | | |
|----------|-----------------------------|---------|----|----------|-------|
| 单位/UNITS | mm | 尺寸/SIZE | A4 | 比例/SCALE | 1:5:1 |
| 名称/TITLE | 第三视图/THIRD ANGLE PROJECTION | | | | |
| | WJ0603-06XX-1YY-00A | | | | |



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD