

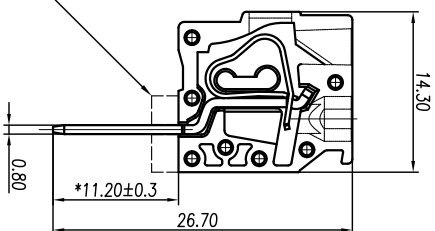
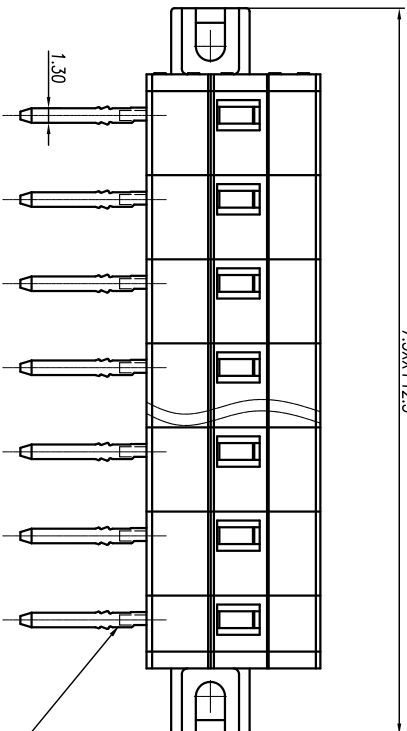





慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD

产品规格书
THE SPEC SHEET

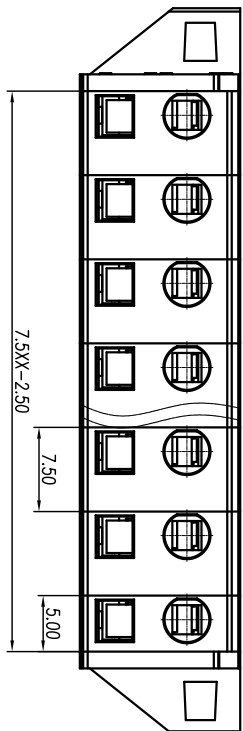

参考标准/Standard

额定电压/Rated voltage

额定电流/Rated current

接触电阻/Contact resistance

绝缘电阻/Insulation resistance

使用线径/Wire range

耐电压/With standing voltage

机械性能/Mechanical

剥线长度/Strip length

温度范围/Temp.Range

尺寸/Dimensions

间距/Pitch

极数/Poles

材质及电镀/Material

塑件/Housing

弹片/Wire guard

导电针/Conductor

UL

IEC

300V

250V

15A

16A

20mΩ

500MΩ/DC500V

28-12AWG 2.5mm²

AC 2000V/1 Min

8-9mm

-40°C~+105°C

7.5mm

2-24P

PA66, UL94V-0

Stainless steel

Red copper, Tin plated

linear dimension(Tolerances Standard GB/T 14486-2008)

tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06	0.12	0.4
variable range	to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	over 200 to 250	over 250 to 250	all	to 5	over 5 to 30	over 30 to 120	over 120 to 120

单位/UNITS mm 尺寸/SIZE A4 比例/SCALE 1:5.1



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

第三视图/THIRD ANGLE PROJECTION



名称/TITLE
WJ0604-03XX-1YY-00A