

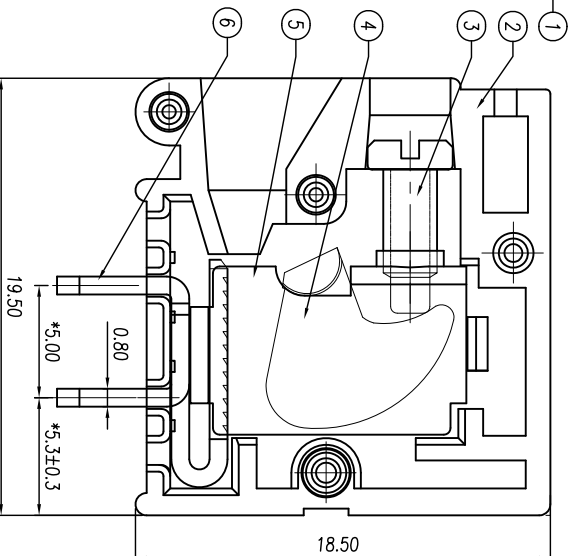


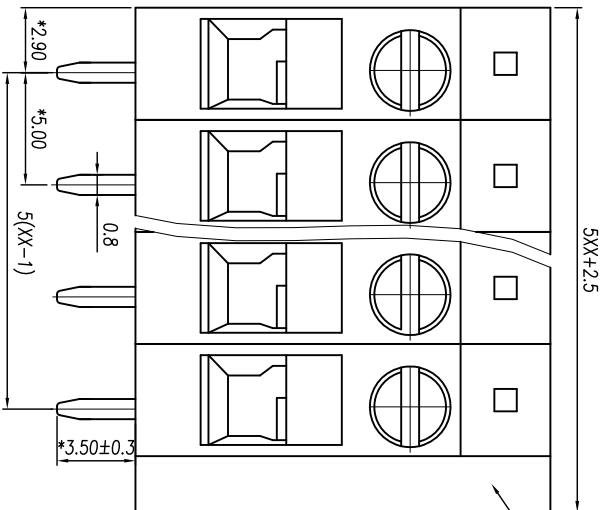

# 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD

产品规格书  
THE SPEC SHEET

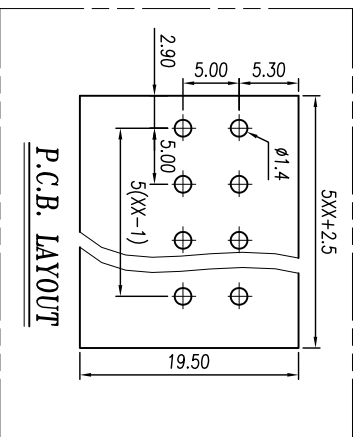

|                  |          |                 |          |          |          |          |           |            |            |            |            |     |        |         |           |            |
|------------------|----------|-----------------|----------|----------|----------|----------|-----------|------------|------------|------------|------------|-----|--------|---------|-----------|------------|
| linear dimension | Standard | GB/T 14486-2008 | ≡        | —        | □        | ∥        | ⊥         |            |            |            |            |     |        |         |           |            |
| tolerance        | ±0.1     | ±0.14           | ±0.19    | ±0.25    | ±0.32    | ±0.43    | ±0.57     | ±0.72      | ±0.88      | ±1.05      | ±1.25      | 0.5 | 0.025  | 0.06    | 0.12      | 0.4        |
| variable range   | 6 to 10  | 6 to 10         | 10 to 18 | 18 to 30 | 30 to 50 | 50 to 80 | 80 to 120 | 120 to 160 | 160 to 200 | 200 to 250 | 250 to 250 | all | 5 to 5 | 5 to 30 | 30 to 120 | 120 to 120 |

|                            |                |                    |
|----------------------------|----------------|--------------------|
| 参考标准/Standard              | UL             | IEC                |
| 额定电压/Rated voltage         | 300V           | 250V               |
| 额定电流/Rated current         | 20A            | 24A                |
| 接触电阻/Contact resistance    | 20mΩ           |                    |
| 绝缘电阻/Insulation resistance | 500MΩ /DC500V  |                    |
| 使用线径/Wire range            | 24~12AWG       | 2.5mm <sup>2</sup> |
| 耐电压/Wrth standing voltage  | AC 2000V/1 Min |                    |
| 机械性能/Mechanical            |                |                    |

|                    |                   |
|--------------------|-------------------|
| 最大扭矩/Torque(Max)   | 0.4Nm(3.6lb.in)   |
| 温度范围/Temp Range    | -40°C~+105°C      |
| 瞬时温度/MAX Soldering | +250°C, for 5 Sec |
| 剥线长度/Steip Length  | 12-13mm           |

|                |               |
|----------------|---------------|
| 尺寸/Dimensions  |               |
| 间距/Pitch       | 5.0mm         |
| 极数/Poles       | 2-30p         |
| 材质及电镀/Material | PA66, UL94V-0 |

|                |                       |
|----------------|-----------------------|
| 塑料/Housing     | PA66, UL94V-0         |
| 螺丝/Screws      | M2.5 Steel Zn plated  |
| 焊脚/Pin header  | Brass 0.8t Tin plated |
| 方块/Cage        | Steel Zn plated       |
| 滑块/Slide block | Steel Zn plated       |

|          |    |         |    |          |     |
|----------|----|---------|----|----------|-----|
| 单位/UNITS | mm | 尺寸/SIZE | A4 | 比例/SCALE | 3:1 |
|----------|----|---------|----|----------|-----|



|          |                             |
|----------|-----------------------------|
| 名称/TITLE | 第三视图/THIRD ANGLE PROJECTION |
|          | ⊕                           |
|          | ⊖                           |
| 名称/TITLE | WJ105R-5.0-XXP-1YY-00A      |