

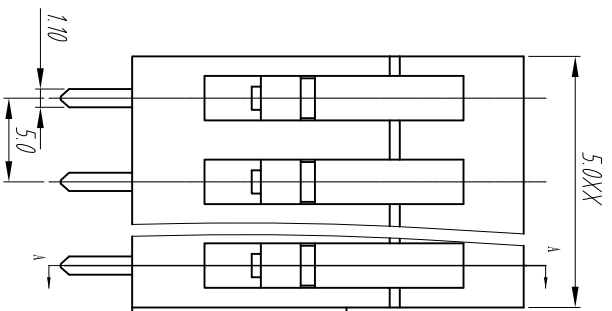



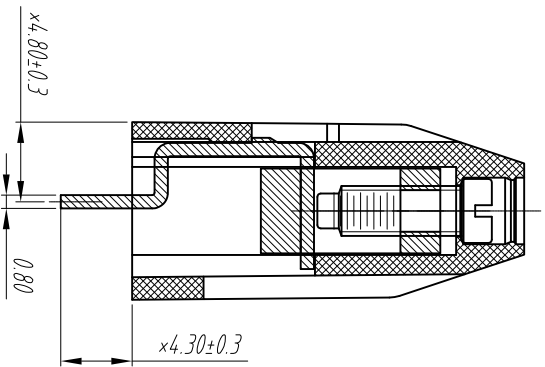

# 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD

产品规格书  
THE SPEC SHEET

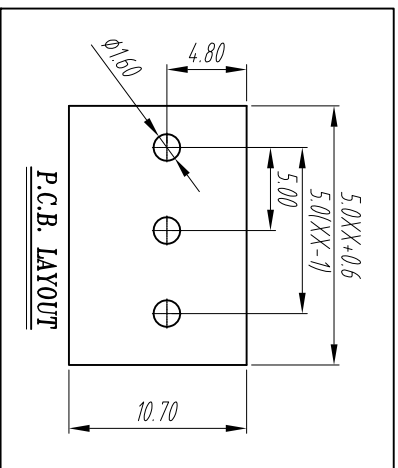

### 材质及电镀

焊脚: 黄铜, 镀铜锡  
塑件: PA66, UL94V-0  
螺丝: M3, 钢, 镀彩锌  
方块: 黄铜, 镀镍

### 电气性能

参考标准: UL IEC  
额定电压: 300V 250V  
额定电流: 10A 24A  
接触电阻: 20mΩ  
绝缘电阻: 500MΩ/DC500V  
耐电压: AC2000V/1Min  
使用线径: 24-14AWG (UL) 2.5mm<sup>2</sup> (IEC)

### 机械性能

温度范围: -40° C~+105° C  
瞬间温度: +250° C 5秒  
扭矩: 0.5Nm (4.51b. in)  
剥线长度: 6-7mm

	linear dimension (Tolerances Standard GB/T 14486-2008)										≡	—	□	//	⊥		
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06	0.12	0.4	
variable range	6 to 10	6 to 10	10 to 18	10 to 18	18 to 30	18 to 30	30 to 50	30 to 50	50 to 80	50 to 80	80 to 120	120 to 160	160 to 200	200 to 250	250 to 5	5 to 30	30 to 120

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	2:1
------------	----	-----------	----	------------	-----

慈溪市万捷电子有限公司  
CIXI WANJIE ELECTRONIC CO., LTD

第三视图 / THIRD ANGLE PROJECTION



名称 / TITLE  
WJ121-5.0-XXP-1YY-00B