# 慈溪市万捷电子有限公司
# CIXI WANJIE ELECTRONIC CO., LTD

产品规格书
product specification

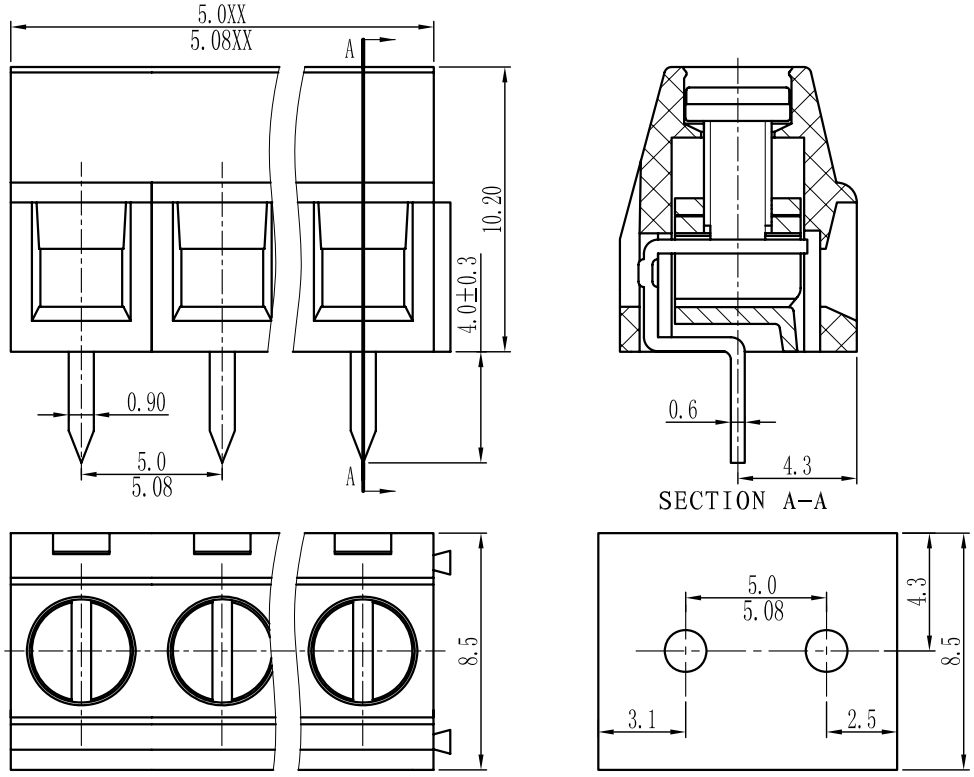


## 电 气 性 能/Electrical

参考标准/Standard: UL IEC
额定电压/Rated voltage: 300V 250V
额定电流/Rated current: 8A 15A
接触电阻/Contact resinstance: 20mΩ
使用线径/Wire range: 26-16AWG 1.5mm²
耐电压/Withstanding voltage: AC2000V/1Min
绝缘电阻/Insulation resistance: 500MΩ/DC500V

## 机 械 性 能/Mechanical

温度范围/Temp.Range: -40° C~+105° C
扭 矩/Torque: 0.4Nm(3.51b`in)
剥线长度/Strip length: 6-7mm

## 尺 寸/Dimensions

间 距/Pitch: 5.0mm,5.08mm
极 数/Poles: 2P-24P

## 材 质 及 电 镀/Material

塑 件/Housing: PA66,UL94V-0
螺 丝/Screws: M2.5,steel Zinc plated
方 块/Cage: Brass,Ni plated
焊 脚/Pin header: Brass,Snle plated

## 订 购 方 式：
## HOW TO ORDER

□□ - □ □ P - □□□ - XXX 客户需求 Custmor Request

- □□ 型号/Model
- □ 极数/POLE
- □ 0.未定义/No definition; 1.单间距/Sing pitch; 2.双倍间/Double pitch
- □□□ 灰色/Grey 10; 蓝色/Blue 20; 黑色/Black 30; 绿色/Green 40; 橙色/Orange 50; 红色/Red 60; 透明/Transparent 70; 黄色/Yellow 80; 白色/White 90

## TOLERANCES EXCEPT AS NOTED

| | linear dimension | | | | | fillet | chamfer | | short angle sid | | | | | — | ▱ | // | ⊥ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| variable range | to 6 | over 6 to 30 | over 30 to 120 | over 120 to 480 | over 480 to | all | to 6 | over 6 to | to 10 | over 10 to 50 | over 50 to 120 | over 120 to | all | to 5 | over 5 to 30 | over 30 to 120 | over 120 to |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.9 | ±0.2 | ±0.5 | ±1 | 1° | 30' | 20' | 10' | 0.5 | 0.025 | 0.06 | 0.12 | 0.4 |

| 单位/UNITS | mm | 尺寸/SIZE | A4 | 比例/SCALE | 比例 | 第一视角/FIRST ANGLE PROJECTION |
|---|---|---|---|---|---|---|
| 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD | | | | | | 名称/NAME: WJ127-XXP-1YY-00A |