



慈溪市万捷电子有限公司

CIXI WANJIE ELECTRONIC CO., LTD



产品规格书
product specification

电气性能/Electrical

参考标准/Standard: UL IEC
 额定电压/Rated voltage: 300V 250V
 额定电流/Rated current: 10A 15A
 使用线径/Wire range: 22-16AWG 1.5mm²
 耐电压/Withstanding voltage: AC2000V/1Min
 绝缘电阻/Insulation resistance: 500M Ω /DC500V
 机械性能/Mechanical
 温度范围/Temp.Range: -40 $^{\circ}$ C~+105 $^{\circ}$ C
 瞬间温度/MAX Soldering: +250 $^{\circ}$ C, for 5 Sec
 剥线长度/Strip length: 10mm

尺寸/Dimensions


间距/Pitch: 5.0mm, 5.08mm
 极数/Poles: 1P-XXP
 材质及电镀/Material
 塑件/Housing: PA66, UL94V-0
 簧片/Wire guard: Stainless steel(SUS301)
 焊脚/Pin header: Brass, Tin plated

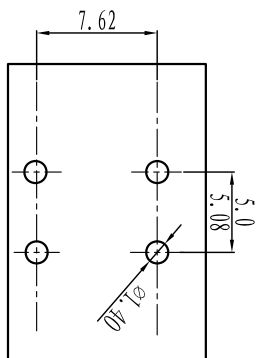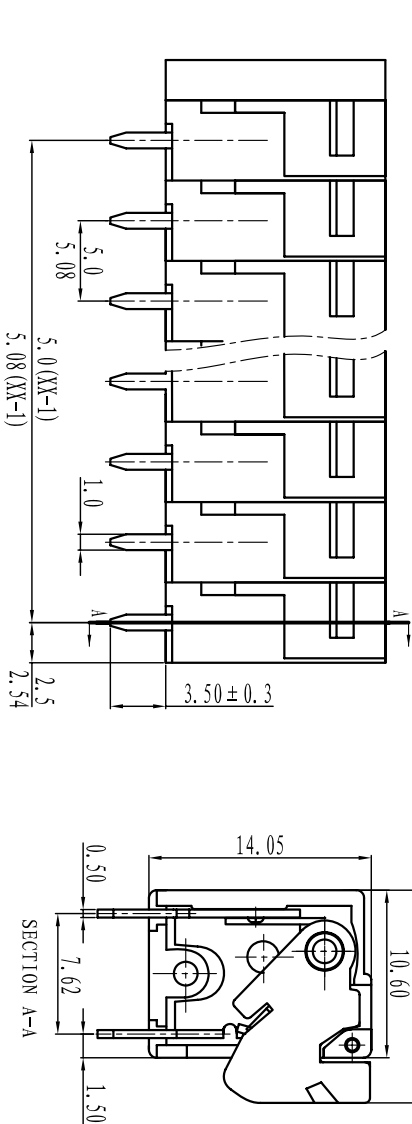

TOLERANCES EXCEPT AS NOTED

	linear dimension	fillet	chamfer	short angle sid	≡	—	□	//	⊥
variable range	over 6 to 6	over 30 to 120	over 120 to 480	all to 6	over 6 to 6	over 10 to 10	over 50 to 50	over 120 to 120	all to 5
tolerance	±0.1 to ±0.2	±0.3 to ±0.5	±0.9 to ±0.2	±0.5 to ±1	±1 to 1 $^{\circ}$	30 $^{\circ}$ to 20 $^{\circ}$	10 $^{\circ}$ to 0.5	0.025 to 0.06	0.12 to 0.4

订购方式：
HOW TO ORDER

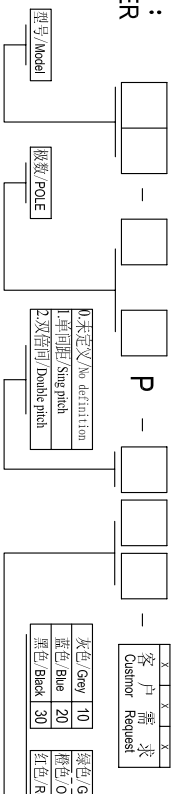

颜色/Color	10	20	30	40	50	60	70	80	90
灰色/Grey	10	20	30	40	50	60	70	80	90
蓝色/Blue	10	20	30	40	50	60	70	80	90
黑色/Black	10	20	30	40	50	60	70	80	90
绿色/Green	10	20	30	40	50	60	70	80	90
橙色/Orange	10	20	30	40	50	60	70	80	90
红色/Red	10	20	30	40	50	60	70	80	90
透明/Transparent	10	20	30	40	50	60	70	80	90
黄色/Yellow	10	20	30	40	50	60	70	80	90
白色/White	10	20	30	40	50	60	70	80	90

单位/UNITS mm 尺寸/SIZE A4 比例/SCALE

第一视角/FIRST ANGLE PROJECTION



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

名称/NAME WJ142V-5; 0.5; 08-XXP-1Y-00A