

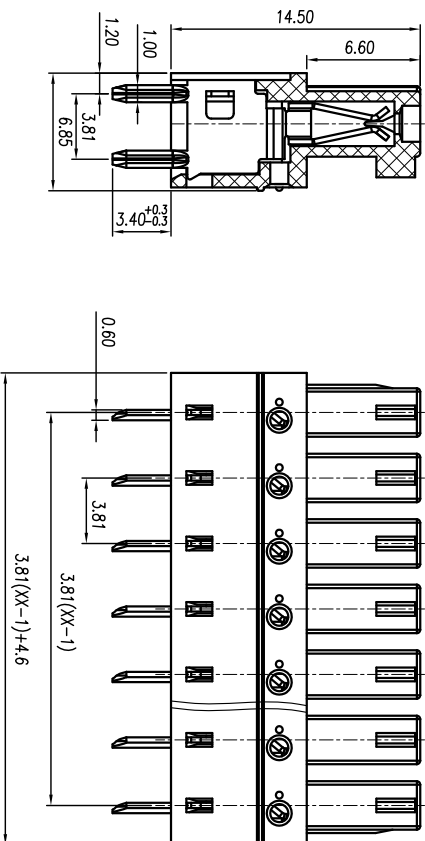



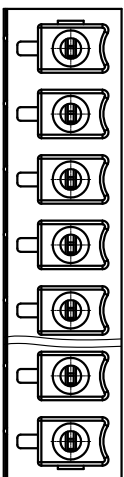

慈溪市万捷电子有限公司

CIXI WANJIE ELECTRONIC CO., LTD

产品规格书
THE SPEC SHEET

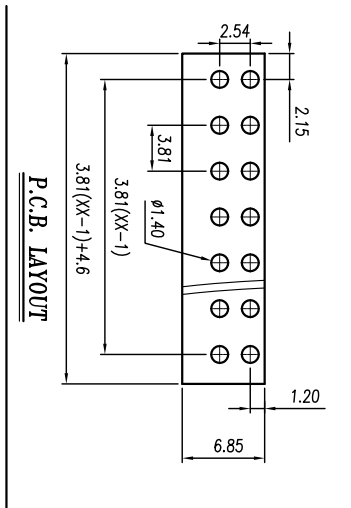

linear dimension	Tolerances Standard GB/T 14486-2008															
variable range	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	over 200 to 250	over 250 to 500	all	over 5 to 30	over 30 to 120			
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06	0.12	0.4

材质及电镀

塑件: PA66, UL94V-0
 夹子: 磷青铜, 镀锡
 线数: 2-24P

电气性能

参考标准: UL IEC
 额定电压: 300V 250V
 额定电流: 8A 10A
 接触电阻: 20mΩ
 绝缘电阻: 500MΩ/DC500V
 耐电压: AC2000V/1Min

机械性能

温度范围: -40° C~+105° C
 瞬时温度: +250° C 5秒
 "XX"表示夹子数量。
 "YY"表示颜色代码。具体参照我司色卡。

单位 / UNITS mm 尺寸 / SIZE A4 比例 / SCALE 2:3.1



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

第三视图 THIRD ANGLE PROJECTION



名称 / TITLE WJ/5E1GB-3.81-XXP-YY-00A