



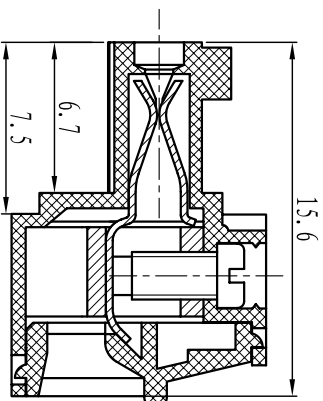


慈溪市万捷电子有限公司

CIXI WANJIE ELECTRONIC CO., LTD

产品规格书
product specification

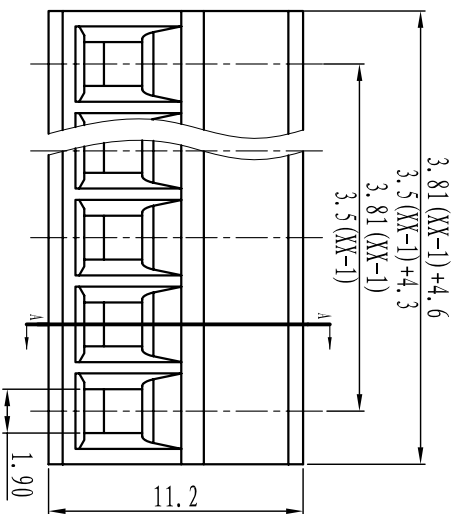


SECTION A-A

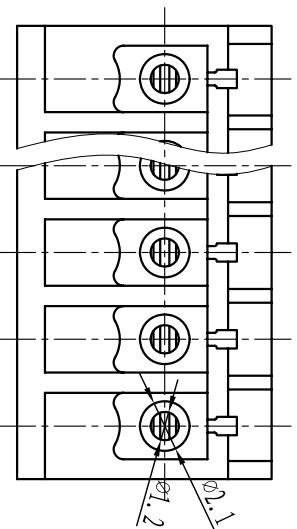

TOLERANCES EXCEPT AS NOTED

	linear dimension	fillet	chamfer	short angle sid	≡	□	//	⊥
variable range	6 to 30 6 to 120 6 to 480	all to 6	6 to 10 6 to 50 6 to 120	10 to 50 10 to 120	all to 5 all to 30	5 to 120 5 to 30	to to 120 to to 120	over over
tolerance	±0.1 ±0.2 ±0.3 ±0.5 ±0.9	±0.2 ±0.5 ±1	1° 30° 20° 10°	0.5 0.025 0.06 0.12	0.4			

订购方式：
HOW TO ORDER

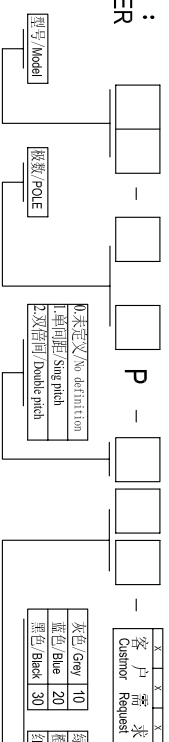

电气性能/Electrical
 参考标准/Standard: UL IEC
 额定电压/Rated voltage: 300V 250V
 额定电流/Rated current: 8A 10A
 接触电阻/Contact resistance: 20mΩ
 使用线径/Wire range: 28-16AWG 1.5mm²
 耐电压/Withstanding voltage: AC2000V/1Min
 绝缘电阻/Insulation resistance: 500MΩ/DC500V

机械性能/Mechanical
 温度范围/Temp.Range: -40° C~+105° C
 扭矩/Torque: 0.2Nm (1.71lb`in)
 剥线长度/Strip length: 6-7mm

尺寸/Dimensions
 间距/Pitch: 3.81mm/3.5mm
 极数/Poles: 2P-24P

材质及电镀/Material
 塑件/Housing: PA66 U94V-0
 螺丝/Screws: M2, steel Zinc plated
 方块/Wire guard: Brass, Ni plated
 夹子/Clamp: Phosphor bronze, Ni plated

单位/UNITS mm 尺寸/SIZE A4 比例/SCALE

第一视角/FIRST ANGLE PROJECTION



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

名称/NAME

WJ15BNGC-XXD-11Y-00A