



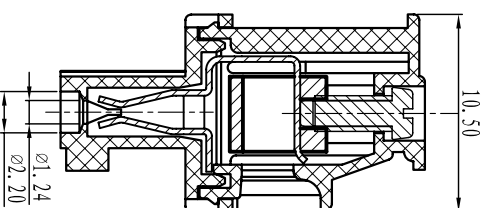


慈溪市万捷电子有限公司

CIXI WANJIE ELECTRONIC CO., LTD

产品规格书
product specification

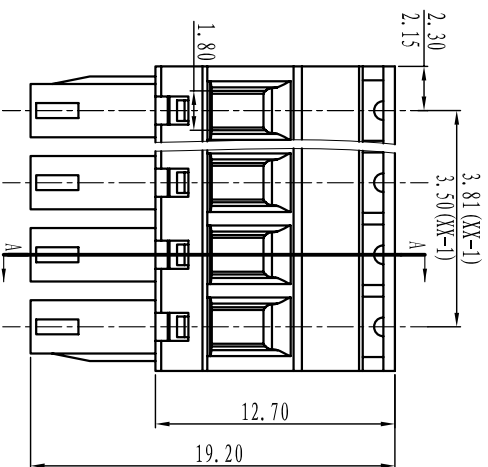

SECTION A-A



电气性能/Electrical

参考标准/Standard: UL IEC
 额定电压/Rated voltage: 300V 250V
 额定电流/Rated current: 8A 10A
 接触电阻/Contact resistance: 20mΩ
 使用线径/Wire range: 28-16AWG 1.5mm²
 耐电压/Withstanding voltage: AC2000V/1Min
 绝缘电阻/Insulation resistance: 500MΩ/DC500V

机械性能/Mechanical

温度范围/Temp.Range: -40°C~+105°C
 扭矩/Torque: 0.2Nm(1.71lb`in)
 剥线长度/Strip length: 6-7mm


尺寸/Dimensions

间距/Pitch: 3.81mm, 3.50mm
 极数/Poles: 2P-24P

材料及电镀/Material

塑件/Housing: PA66, UL94V-0
 螺丝/Screws: M2, Steel Zinc plated
 方块/Wire guard: Brass, Ni plated
 夹子/Clamp: Phosphor bronze, Ni plated

订购方式: HOW TO ORDER

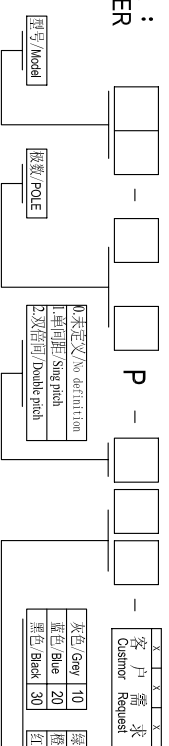

灰色/Gray	10	绿色/Green	40	透明/Transparent	70
蓝色/Blue	20	棕色/Orange	50	黄色/Yellow	80
黑色/Black	30	红色/Red	60	白色/White	90

客户需求	X	X	X	X	X
Customer Request					

第一视角/FIRST ANGLE PROJECTION	
-----------------------------	--

TOLERANCES EXCEPT AS NOTED

	linear dimension				fillet		chamfer		short angle sid				≡		∇		∥		⊥	
variable range	to 6	to 30	to 120	to 480	all	to 6	to 10	to 50	to 120	to 10	to 50	to 120	all	to 5	to 30	to 120	to 10	to 50	to 120	to 120
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1°	30'	20'	10'	0.5	0.025	0.06	0.12	0.4			

单位/UNITS	尺寸/SIZE	A4	比例/SCALE
mm			



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

名称/NAME

WJ15DCK-A-XP-11V-01A