

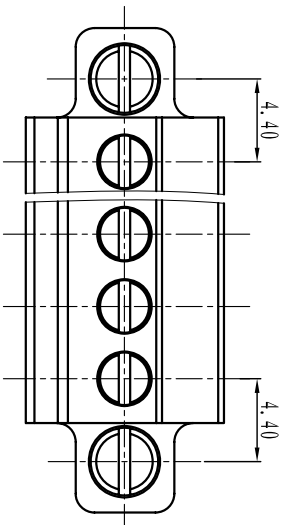


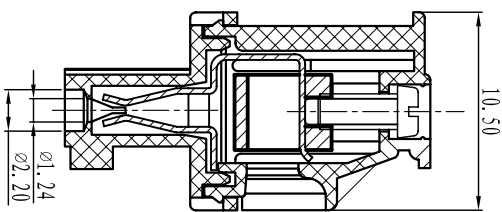

慈溪市万捷电子有限公司

CIXI WANJIE ELECTRONIC CO., LTD


产品规格书
Product specification

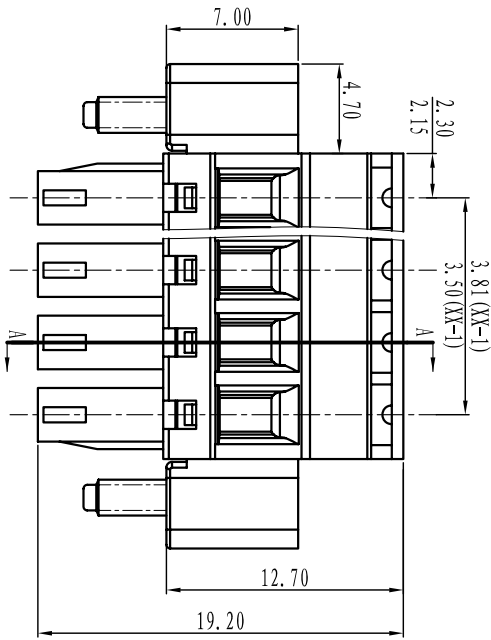

TOLERANCES EXCEPT AS NOTED

	linear dimension	fillet	chamfer	short angle sid				
variable range	to 6 to 30 to 120	all to 6	over 6 to 10 to 50	over 10 to 50 to 120	all to 5 to 30	over 5 to 30 to 120	over 30 to 120	over 120
tolerance	±0.1 ±0.2 ±0.3 ±0.5 ±0.9	±0.2 ±0.5 ±1	1° 30'	20'	10'	0.5 0.025 0.06 0.12 0.4		

订购方式：
HOW TO ORDER

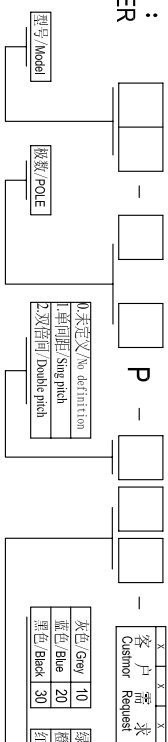

- 电气性能/Electrical
- 参考标准/Standard: UL IEC
- 额定电压/Rated voltage: 300V 250V
- 额定电流/Rated current: 8A 10A
- 接触电阻/Contact resistance: 20mΩ
- 使用线径/Wire range: 28-16AWG 1.5mm²
- 耐电压/Withstanding voltage: AC2000V/1Min
- 绝缘电阻/Insulation resistance: 500MΩ/DC500V
- 机械性能/Mechanical
- 温度范围/Temp.Range: -40°C+105°C
- 扭矩/Torque: 0.2Nm(1.716 in)
- 剥线长度/Strip length: 6-7mm
- 尺寸/Dimensions
- 间距/Pitch: 3.81mm
- 极数/Poles: 2P-24P
- 材料及电镀/Material
- 塑件/Housing: PA66, UL94V-0
- 螺丝/Screws: M2, steel Zinc plated
- 固定螺丝/Screws: M2.5, steel Zinc plated
- 方块/Wire guard: Brass, Ni plated
- 夹子/Clamp: Phosphor bronze, Ni plated

单位/UNITS mm 尺寸/SIZE A4 比例/SCALE

第一视角/FIRST ANGLE PROJECTION



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

名称/NAME

WJ135DK-M-XXP-1Y-001