

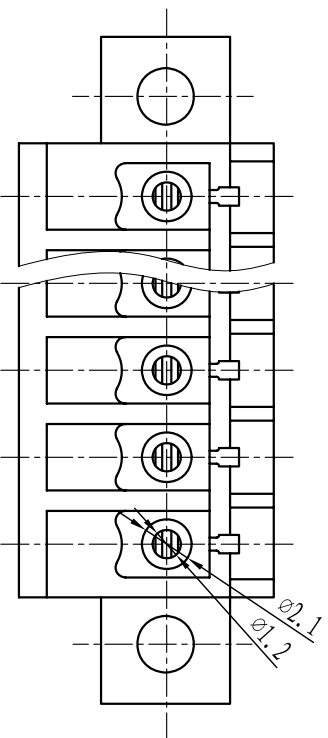


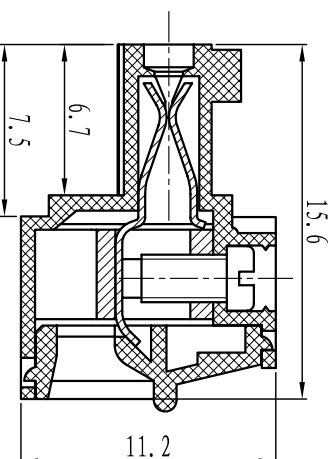

慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD


产品规格书
product specification

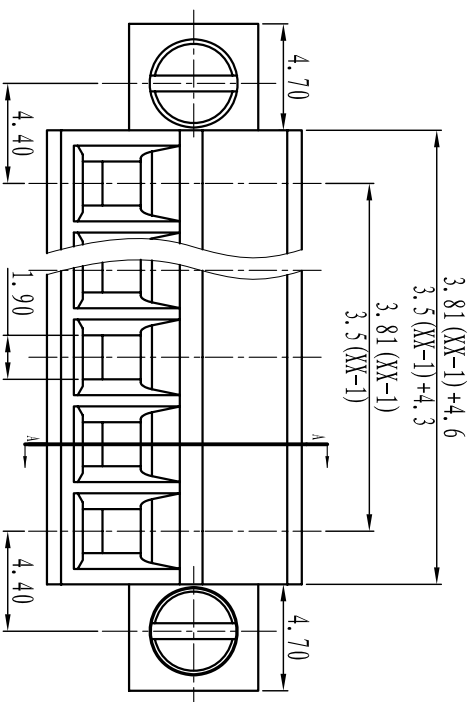

TOLERANCES EXCEPT AS NOTED

	linear dimension				fillet	chamfer	short angle sid			
variable range	6 to 6	30 to 30	120 to 120	480 to 480	all to 6	6 to 6	10 to 10	50 to 50	120 to 120	all to 5
tolerance	±0.1	±0.2	±0.3	±0.5	±0.2	±1	1°	30'	20'	10'

订购方式：
HOW TO ORDER

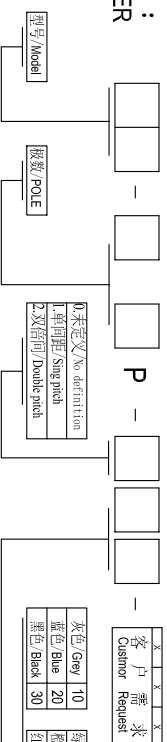

电气性能/Electrical
 参考标准/Standard: UL IEC
 额定电压/Rated voltage: 300V 250V
 额定电流/Rated current: 8A 10A
 接触电阻/Contact resistance: 20mΩ
 使用线径/Wire range: 28-16AWG 1.5mm²
 耐电压/Withstanding voltage: AC2000V/1Min
 绝缘电阻/Insulation resistance: 500MΩ/DC500V
 机械性能/Mechanical
 温度范围/Temp.Range: -40°C+105°C
 扭矩/Torque: 0.2Nm(1.71b`in)
 剥线长度/Strip length: 6-7mm
 尺寸/Dimensions
 间距/Pitch: 3.81mm/3.5mm
 极数/Poles: 2P-24P
 材料及电镀/Material
 塑件/Housing: PA66, UL94V-0
 螺丝/Screws: M2, steel Zinc plated
 固定螺丝/Screws: M2.5, steel Zinc plated
 方块/Wire guard: Brass, Ni plated
 夹子/Clamp: Phosphor bronze, Ni plated

单位/UNITS mm 尺寸/SIZE A4 比例/SCALE

第一视角/FIRST ANGLE PROJECTION



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

名称/NAME WJ15EDKAN-XXP-11Y-00A



灰色/Gray	10	绿色/Green	40	透明/Transparent	70
蓝色/Blue	20	棕色/Orange	50	黄色/Yellow	80
黑色/Black	30	红色/Red	60	白色/White	90