

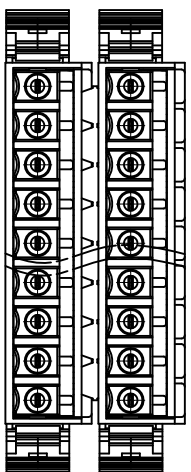
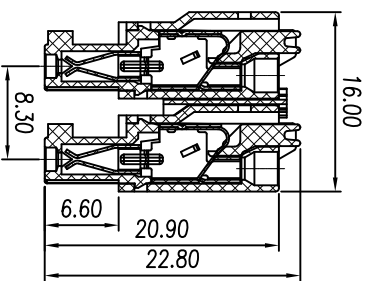
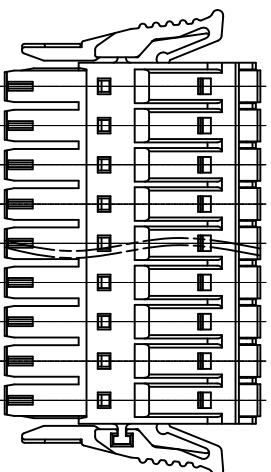



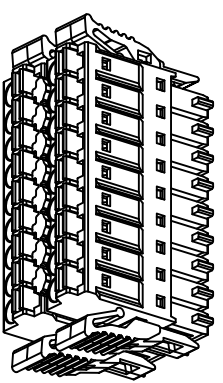

慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD

产品规格书
THE SPEC SHEET

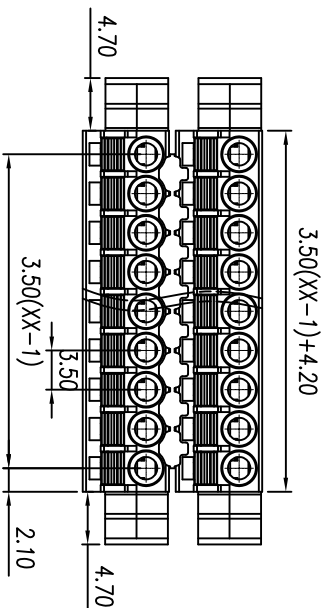

电气性能/Electrical

- 参考标准/Standard: UL IEC
- 额定电压/Rated voltage: 300V 250V
- 额定电流/Rated current: 8A 10A
- 接触电阻/Contact resistance: 20mΩ
- 使用线径/Wire range: 24-16AWG 1.0mm²
- 耐电压/Withstanding voltage: AC2000V/1Min
- 绝缘电阻/Insulation resistance: 500MΩ/DC500V
- 机械性能/Mechanical
- 温度范围/Temp. Range: -40°C~+105°C
- 剥线长度/Strip length: 9-10mm

尺寸/Dimensions

- 间距/Pitch: 3.5mm,
- 极数/Poles: 2P-24P
- 材质及电镀/Material
- 塑件/Housing: PA66, UL94V-0
- 夹片/Clamp: Phosphor bronze, Tin plated
- 弹片/Strapnel: stainless steel

linear dimension(Tolerances Standard GB/T 14486-2008)	over	±0.14	over	±0.19	over	±0.25	over	±0.32	over	±0.43	over	±0.57	over	±0.72	over	±0.88	over	±1.05	over	±1.25	0.5	0.025	0.06	0.12	0.4
	to	6	10	18	30	50	80	120	160	200	250	250	all	5	30	120									
variable range	to	6	10	18	30	50	80	120	160	200	250	all	5	30	120										
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06	0.12	0.4									

单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	1:5.1
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD					
名称/TITLE	第三视角/THIRD ANGLE PROJECTION				
WJ5EJ30K(G-B)-3-2XWP-1YY-00A					