




# 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD

产品规格书  
THE SPEC SHEET

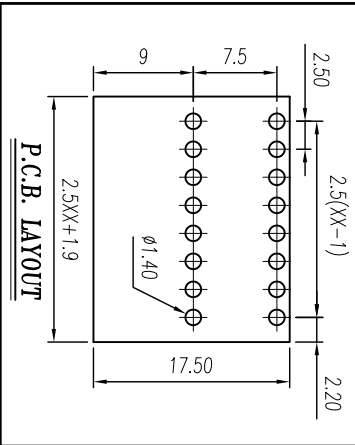




P.C.B. LAYOUT

参考标准/Standard  
 额定电压/Rated voltage  
 额定电流/Rated current  
 接触电阻/Contact resistance  
 绝缘电阻/Insulation resistance  
 耐压/With standing voltage  
 机械性能/Mechanical  
 温度范围/Temp. Range  
 瞬间温度/Temp. Range

### 尺寸/Dimensions

间距/Pitch  
 极数/Poles  
 材质及电镀/Material  
 塑料/Housing  
 焊脚/Pin header

UL IEC  
 150V 250V  
 5A 5A  
 20mΩ  
 500MΩ/DC500V  
 AC 2000V/1 Min  
 -40°C~+105°C  
 +250°C 5秒  
 2.5mm  
 2\*2~2\*24p  
 PA66, UL94V-0  
 Brass, Tin plated

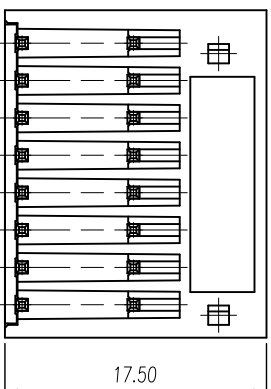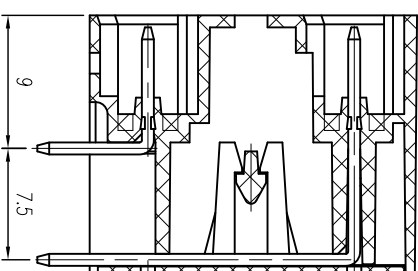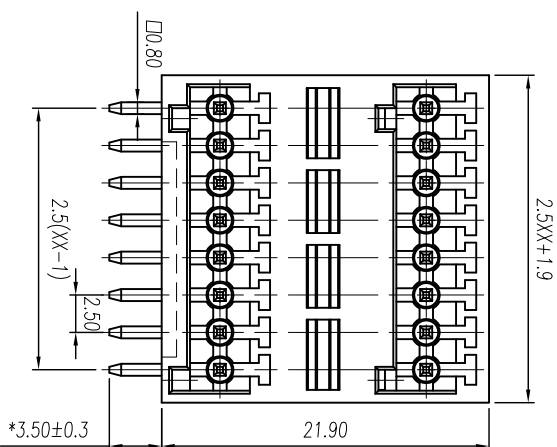

tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06	0.12	0.4
variable range	6 to	6 to	10 to	18 to	30 to	50 to	80 to	120 to	160 to	200 to	250 to	all	5 to	5 to	30 to	120 to
linear dimension	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
	6	10	18	30	50	80	120	160	200	250	250	5	5	30	120	120

linear dimension (Tolerances Standard GB/T 14486-2008)



单位/UNITS mm 尺寸/SIZE A4 比例/SCALE 2:1

第三视图/THIRD ANGLE PROJECTION



慈溪市万捷电子有限公司  
CIXI WANJIE ELECTRONIC CO., LTD

名称/TITLE

WJ5ED3RH-2.5\*2XXP-1YY-00A