



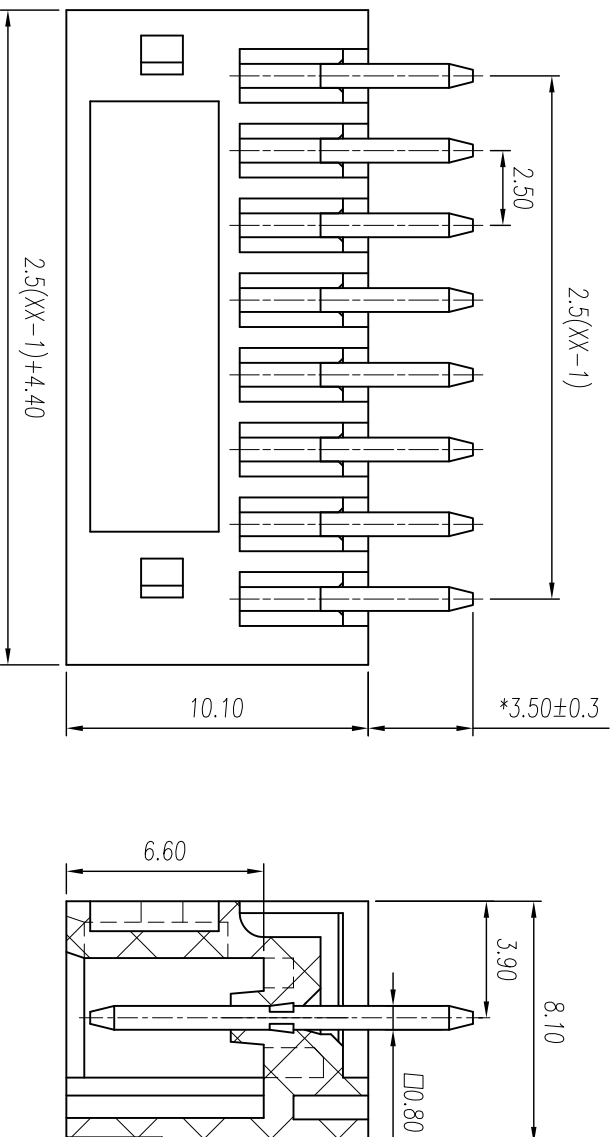


# 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD

产品规格书  
THE SPEC SHEET

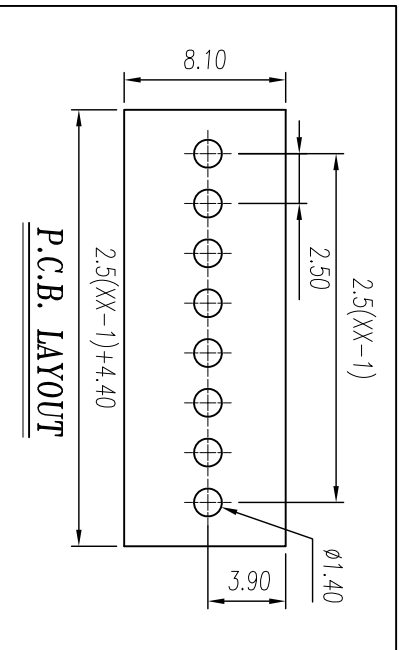

参考标准/Standard UL IEC  
 额定电压/Rated voltage 150V 250V  
 额定电流/Rated current 5A 6A  
 接触电阻/Contact resistance 20mΩ  
 绝缘电阻/Insulation resistance 500MΩ/DC500V  
 耐压/With standing voltage AC 1250V/1 Min  
 机械性能/Mechanical  
 温度范围/Temp.Range -40°C~+105°C  
 瞬间温度/Temp.Range +250°C 5秒  
 尺寸/Dimensions  
 间距/Pitch 2.5mm  
 极数/Poles 2~24P  
 材料及电镀/Material PA66, UL94V-0  
 塑件/Housing Brass, Tin plated  
 焊脚/Pin header

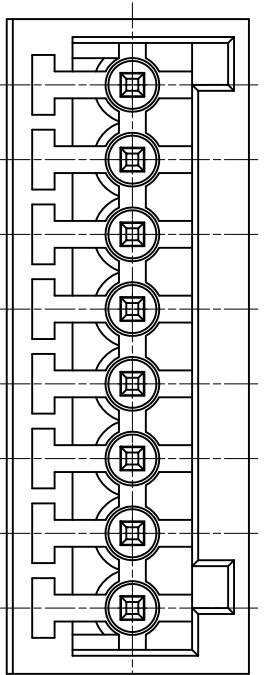

linear dimension/Tolerances Standard GB/T 14486--2008	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06	0.12	0.4			
variable range	6 to	6 to	10 to	18 to	30 to	50 to	80 to	120 to	160 to	200 to	250 to	all	5 to	5 to	30 to	120 to			

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	4:1
名称 / TITLE	第三视图/THIRD ANGLE PROJECTION				
	慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD				
	WJ/SEDG/C-2.5-XXP-1YY-00A				