

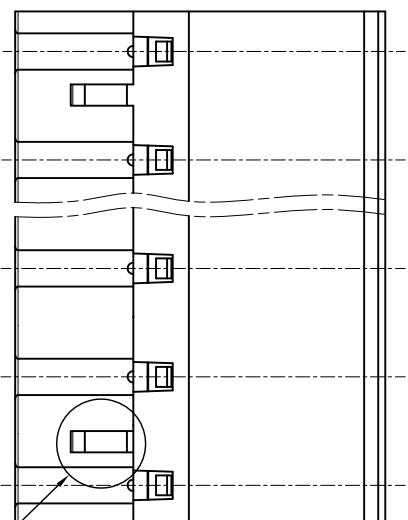
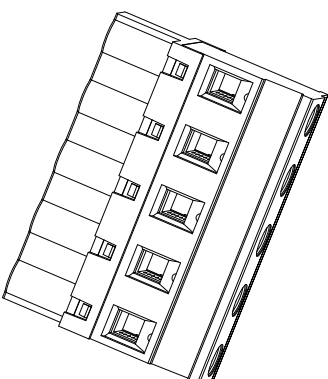
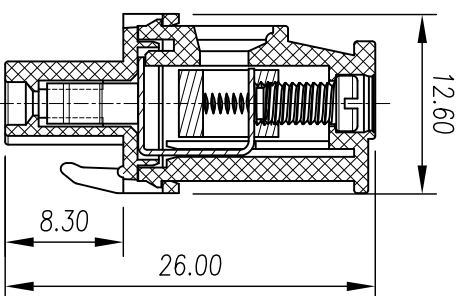


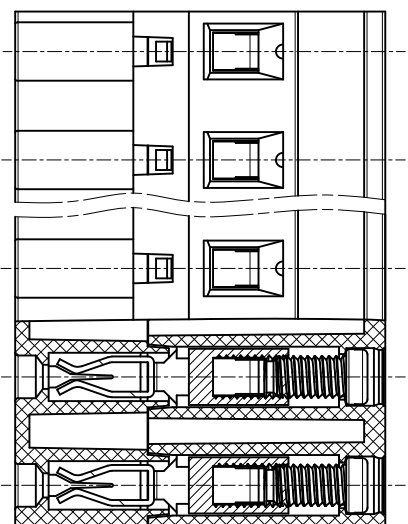

# 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD

产品规格书  
THE SPEC SHEET

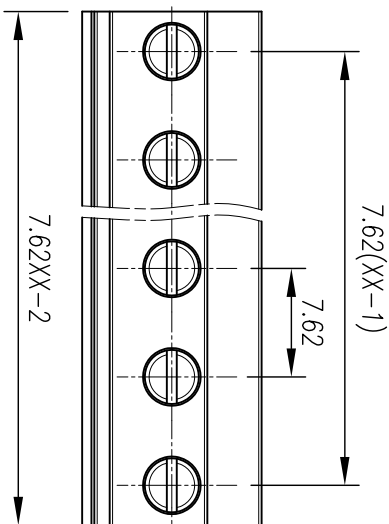

两线时耳  
有卡耳

参考标准/Standard	UL	IEC
额定电压/Rated voltage	300V	320V
额定电流/Rated current	15A	20A
接触电阻/Contact resistance	20mΩ	
绝缘电阻/Insulation resistance	5000Ω /DC500V	
使用线径/Wire range	28-14AWG	1.5mm <sup>2</sup>
耐电压/With standing voltage	AC 2000V/1 Min	
机械性能/Mechanical		
扭矩/Torque	0.5Nm(4.5lb.in)	
剥线长度/Strip Length	7.8mm	
温度范围/Temp. Range	-40°C~+105°C	
尺寸/Dimensions		
间距/Pitch	7.62mm	
极数/Poles	2-24p	
材料及电镀/Material	PA66, UL94V-0	
塑料/Housing	M3 Steel, Zn plated	
螺丝/Screws	Phosphor bronze/Ni plated	
夹子/Clamp	Brass, Ni plated	
方块/Cage		

linear dimension(Tolerances Standard GB/T 14486-2008)

tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06	0.12	0.4
variable range	6 to	6 to	10 to	10 to	18 to	30 to	50 to	80 to	120 to	160 to	200 to	250 to	all to	5 to	30 to	120 to
	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over

单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	2:1
----------	----	---------	----	----------	-----



名称/TITLE	第三规格书 THIRD ANGLE PROJECTION
	WJEDGMB-7.62-XXP-1Y-00A