




# 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD

产品规格书  
THE SPEC SHEET

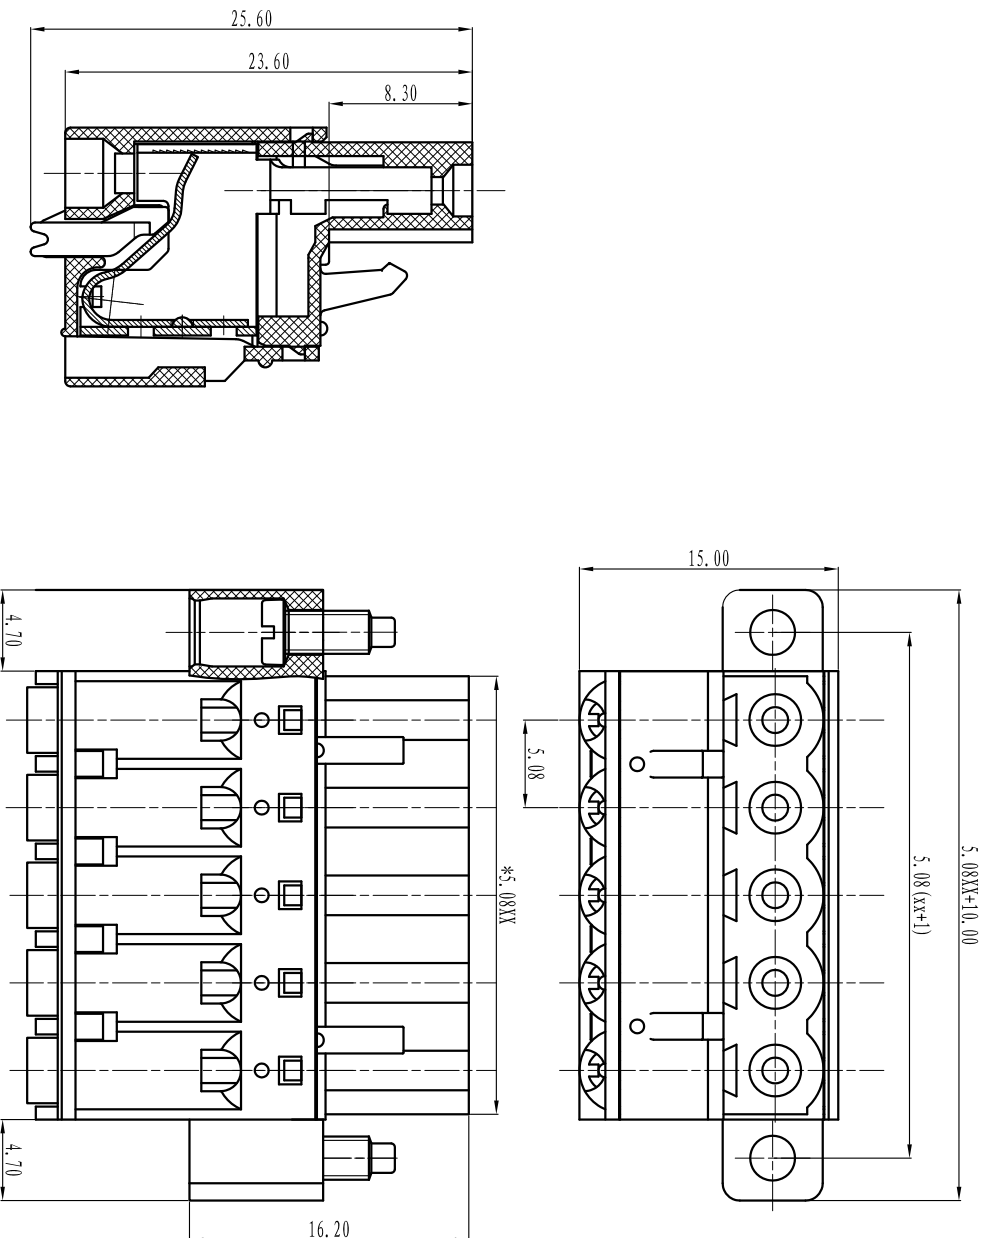

参考标准/Standard	UL	IEC
额定电压/Rated voltage	300V	450V
额定电流/Rated current	12A	17.5A
接触电阻/Contact resistance	20mΩ	
绝缘电阻/Insulation resistance	500MΩ/DC500V	
使用线径/Wire range	28~14AWG	1.5mm <sup>2</sup>
耐电压/With standing voltage	AC 2000V/1 Min	
机械性能/Mechanical		
剥线长度/Strip Length	7.8mm	
温度范围/Temp. Range	-40°C~+105°C	
尺寸/Dimensions		
间距/Pitch	5.08mm	
极数/Poles	2-24p	
材质及电镀/Material		
塑料件/Housing	PA66, UL94V-0	
螺丝/Screws	M2.5 Steel, Zn plated	
弹片/Shrapnel	Stainless steel	
夹子/Clamp	Phosphor bronze, Ni plated	

linear dimension (Tolerances Standard GB/T 14486-2008)	over 6 to over 10	over 10 to over 18	over 18 to over 30	over 30 to over 50	over 50 to over 80	over 80 to over 120	over 120 to over 160	over 160 to over 200	over 200 to over 250	over 250 to all
	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05
variable range	6 to 10	10 to 18	18 to 30	30 to 50	50 to 80	80 to 120	120 to 160	160 to 200	200 to 250	all to 5

单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	3:1
----------	----	---------	----	----------	-----

名称/TITLE	第三视图/THIRD ANGLE PROJECTION
	WJZEDGKDM-5.08-XXP-1YY-004

慈溪市万捷电子有限公司  
CIXI WANJIE ELECTRONIC CO., LTD

