



慈溪市万捷电子有限公司

CIXI WANJIE ELECTRONIC CO., LTD

产品规格书
product specification

电气性能/Electrical

参考标准/Standard: UL IEC
 额定电压/Rated voltage: 300V 320V
 额定电流/Rated current: 15A 20A

接触电阻/Contact resistance: 20m Ω

耐电压/Withstanding voltage: AC2000V/1Min

绝缘电阻/Insulation resistance: 500M Ω /DC500V

机械性能/Mechanical

温度范围/Temp Range: -40 $^{\circ}$ C~+105 $^{\circ}$ C

瞬间温度/MAX Soldering: +250 $^{\circ}$ C, for 5 Sec

尺寸/Dimensions

间距/Pitch: 7.5mm, 7.62mm




极数/Poles: 2P-24P

材料及电镀/Material

塑件/Housing: PA66, UL94V-0

焊针/Pin header: Brass, Tin plated


螺母/Nut: M2.5 Brass

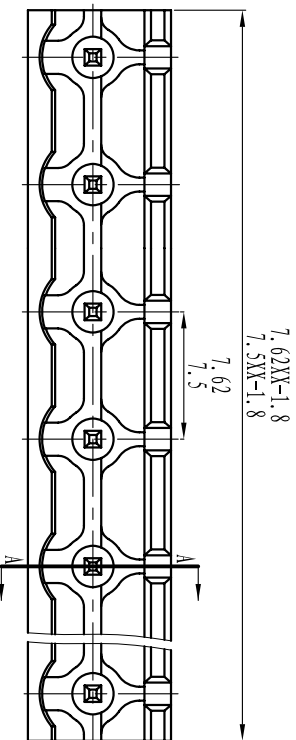

TOLERANCES EXCEPT AS NOTED

	linear dimension	fillet	chamfer	short angle sid	≡	□	//	⊥
variable range	6 to 30 6 to 30 120 to 480	all to 6	over 6 to 10	over 10 to 50 over 50 to 120	all to 5	over 5 to 30	over 30 to 120	over 120 to 480
tolerance	±0.1 to ±0.3 ±0.2 to ±0.5 ±0.3 to ±0.9	±0.2 to ±0.5	±1 to 1 $^{\circ}$	30 $^{\circ}$ to 10 $^{\circ}$ 20 $^{\circ}$ to 10 $^{\circ}$	0.5 to 0.025	0.06 to 0.12	0.12 to 0.4	0.4 to 0.1

订购方式 : HOW TO ORDER

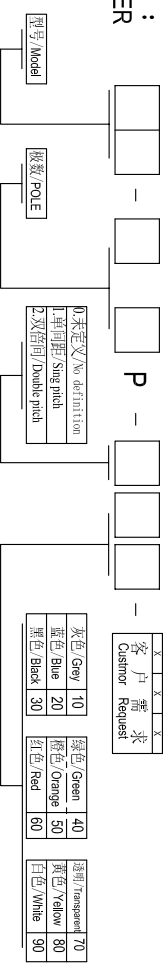

单位/UNITS mm 尺寸/SIZE A4 比例/SCALE

第一视角/FIRST ANGLE PROJECTION



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

名称/NAME

WJ2BGN-XXP-1YY-00A