






慈溪市万捷电子有限公司  
CIXI WANJIE ELECTRONIC CO., LTD

产品规格书  
product specification

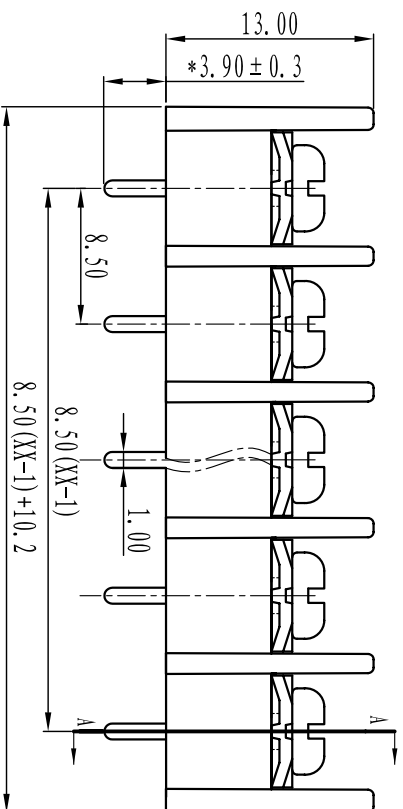

SECTION A-A

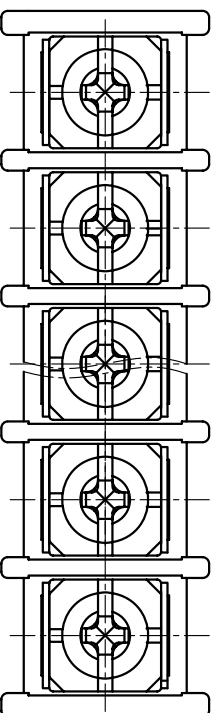

**电气性能/Electrical**  
 参考标准/Standard: UL IEC  
 额定电压/Rated voltage: 300V 450V  
 额定电流/Rated current: 15A 24A  
 使用线径/Wire range: 22-14AWG 2.5mm<sup>2</sup>  
 耐电压/Withstanding voltage: AC2000V/1Min  
 绝缘电阻/Insulation resistance: 500MΩ/DC500V

**机械性能/Mechanical**  
 温度范围/Temp.Range: -40°C~+105°C  
 最大锁紧力矩/Max.Torque: 0.5Nm (4.5lb. in)

**尺寸/Dimensions**

间距/Pitch: 8.5mm  
 极数/Poles: 2P-24P

**材料及电镀/Material**

塑件/Housing: PA66, UL94V-0  
 螺丝/Screws: M3, steel Nickel plated  
 焊脚/Pin header: Brass, 0.8, Tin plated

TOLERANCES EXCEPT AS NOTED

	linear dimension	fillet	chamfer	短角	短角侧边	倒角	倒角
variable range	over 6 to 30	over 30 to 120	over 120 to 480	all to 6	over 6 to 10	over 10 to 50	over 50 to 120
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5
	6 to 30	30 to 120	120 to 480	all to 6	10 to 50	50 to 120	120 to 120
	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5
	6 to 30	30 to 120	120 to 480	all to 6	10 to 50	50 to 120	120 to 120
	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5

订购方式：  
HOW TO ORDER

型号/Model     极数/POLE     未定义/No definition  
 单间距/Single pitch     双间距/Double pitch     客户请求/ Customer Request

灰色/Gray	10	绿色/Green	40	透明/Transparent	70
蓝色/Blue	20	棕色/Orange	50	黄色/Yellow	80
黑色/Black	30	红色/Red	60	白色/White	90

单位/UNITS    尺寸/SIZE    A4    比例/SCALE



慈溪市万捷电子有限公司  
CIXI WANJIE ELECTRONIC CO., LTD

名称/NAME

WJ31-XXP-11Y-00A

