

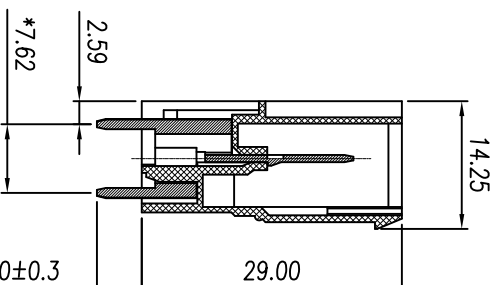
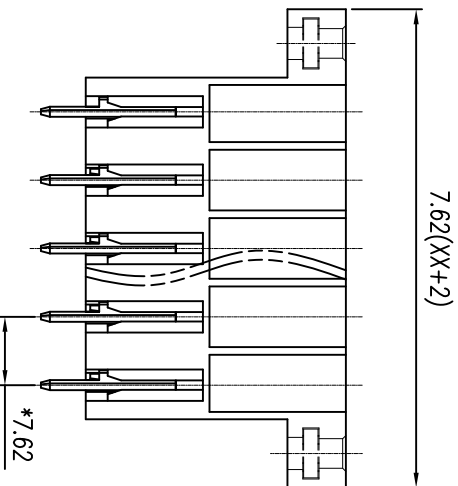




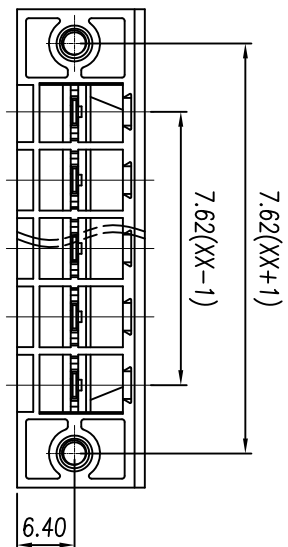

慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD

产品规格书
THE SPEC SHEET

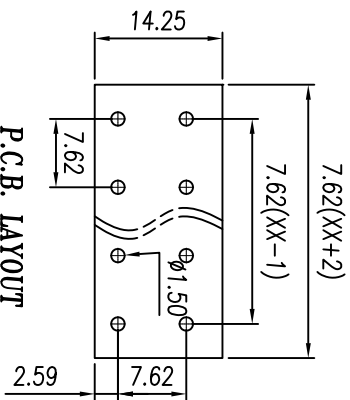

电气性能/Electrical	
参考标准/Standard	UL IEC
额定电压/Rated voltage	300V 600V
额定电流/Rated current	20A 32A
接触电阻/Contact resistance	20mΩ
绝缘电阻/Insulation resistance	500MΩ/DC500V
耐电压/Wrth standing voltage	AC 3000V/1 Min
机械性能/Mechanical	
温度范围/Temp.Range	-40°C~+105°C
瞬时温度/MAX Soldering	+250°C, for 5 Sec
尺寸/Dimensions	
间距/Pitch	7.62mm
极数/Poles	2-12P
材质及电镀/Material	PA66, UL94V-0
塑件/Housing	Red copper, Tin plated
导电针/Conductor	Steel, Zn plated
螺母/Nut	

linear dimension(Tolerances Standard GB/T 14486-2008)	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	over 200 to 250	over 250 to all	over 5 to 30	over 30 to 120	over 120 to 120			
	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06	0.12	0.4
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06	0.12	0.4

单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	1:2.1
----------	----	---------	----	----------	-------

名称/TITLE	第三视图 THIRD ANGLE PROJECTION
	WJ3EFGVM-7.62-XXP-1YY-00A

慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

