
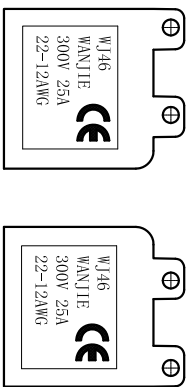
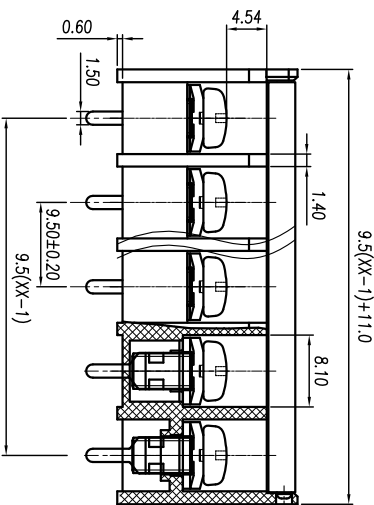

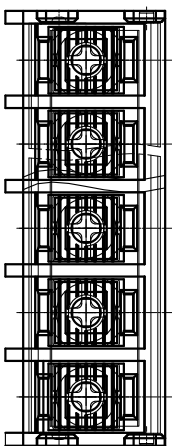


慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD

产品规格书
THE SPEC SHEET

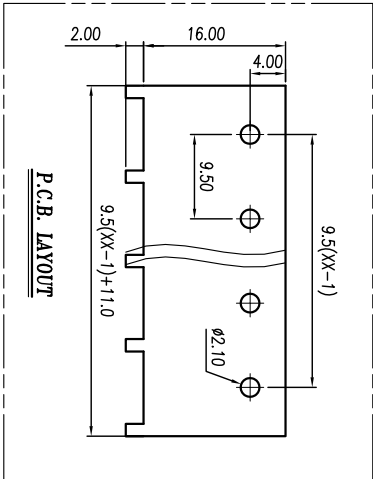

商标示意图

	linear dimension(Tolerances Standard GB/T 14486-2008)															
variable range	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	over 200 to 250	all 5 to 30	over 30 to 120	over 120 to 180				
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.45	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06	0.12	0.4

参考标准/Standard	UL	IEC
额定电压/Rated voltage	300V	450V
额定电流/Rated current	25A	24A
接触电阻/Contact resistance	20mΩ	
绝缘电阻/Insulation resistance	500MΩ/DC500V	
耐电压/Wrth standing voltage	AC 2000V/1 Min	
使用线径/Wire range	22~12AWG	2.5mm ²
机械性能/Mechanical		
温度范围/Temp.Range	-40°C~+105°C	
瞬时温度/MAX Soldering	+250°C for 5 Sec	
扭矩/Torque	1.2Nm(10.6Lb.in)	
尺寸/Dimensions		
间距/Pitch	9.5mm	
极数/Poles	2~12p	
材料及电镀/Material	PA66, UL94V-0	
塑件/Housing	Copper alloy, Sn plated	
焊脚/Pin header	M4 Steel, Ni plated	
螺丝/Screws		

单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	2:1
第三视图/THIRD ANGLE PROJECTION					
名称/TITLE	WJ46GG-XXP-1YY-00A				



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD