

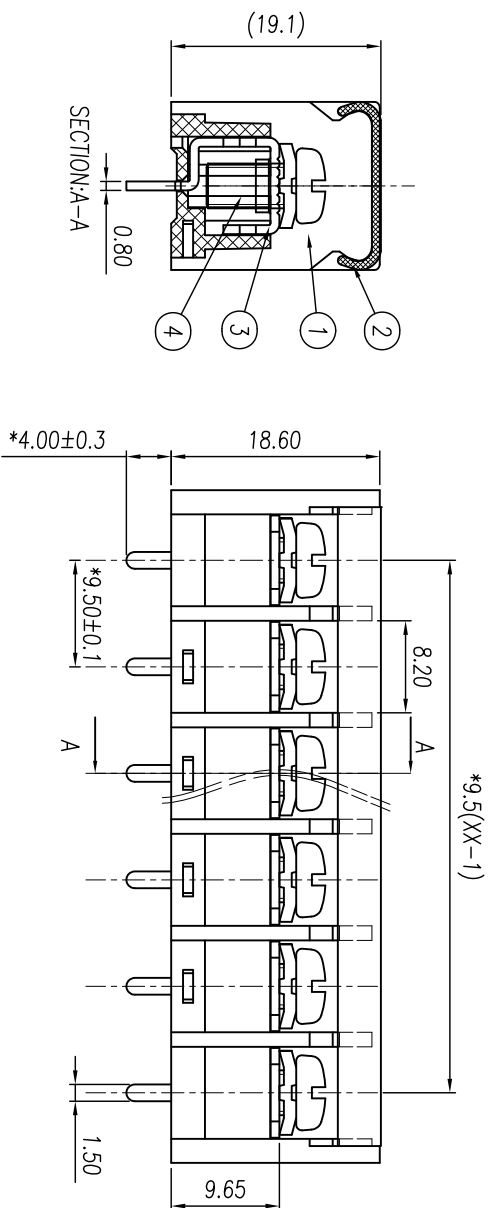


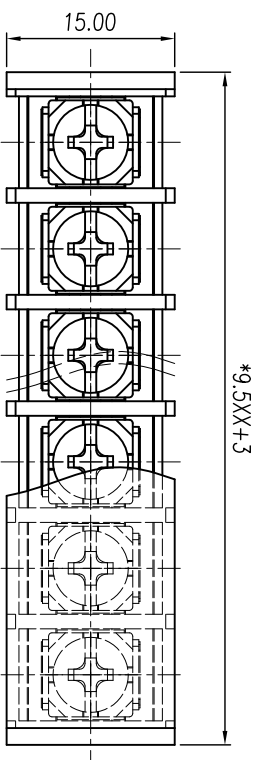

# 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD

产品规格书  
THE SPEC SHEET

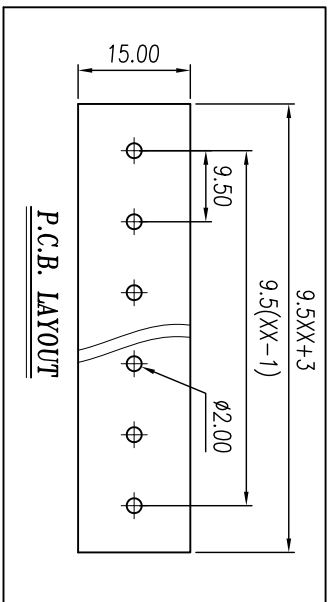

### 电气性能/Electrical

参考标准/Standard	UL	IEC
额定电压/Rated voltage	300V	450V
额定电流/Rated current	20A	24A
接触电阻/Contact resistance	20mΩ	
绝缘电阻/Insulation resistance	500MΩ/DC500V	
使用线径/Wire range	22~12AWG	2.5mm <sup>2</sup>
耐电压/With standing voltage	AC 2000V/1 Min	

### 机械性能/Mechanical

扭矩/Torque	1.2Nm(10.6lb.in)
温度范围/Temp.Range	-40°C~+105°C
瞬时温度/MAX Soldering	+250°C, for 5 Sec

### 尺寸/Dimensions

间距/Pitch	9.5mm
极数/Poles	2~22p
材料及电镀/Material	PA66, UL94V-0

塑件/Housing	M4.0 Steel/Ni plated
螺丝/Screws	Brass 0.8t Tin plated
焊脚/Pin header	PC, UL94V-2
盖板/Cover	

linear dimension(Tolerances Standard GB/T 14486-2008)	≡	—	□	//	⊥											
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06	0.12	0.4
variable range	6 to 10	6 to 10	10 to 18	10 to 18	30 to 50	30 to 50	50 to 80	80 to 120	120 to 160	160 to 200	200 to 250	all to 5	5 to 30	30 to 120	120 to 120	

单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	3:2
名称/TITLE	第三视图/THIRD ANGLE PROJECTION				
	WJ48C-XXP-1YY-00A				



慈溪市万捷电子有限公司  
CIXI WANJIE ELECTRONIC CO., LTD