

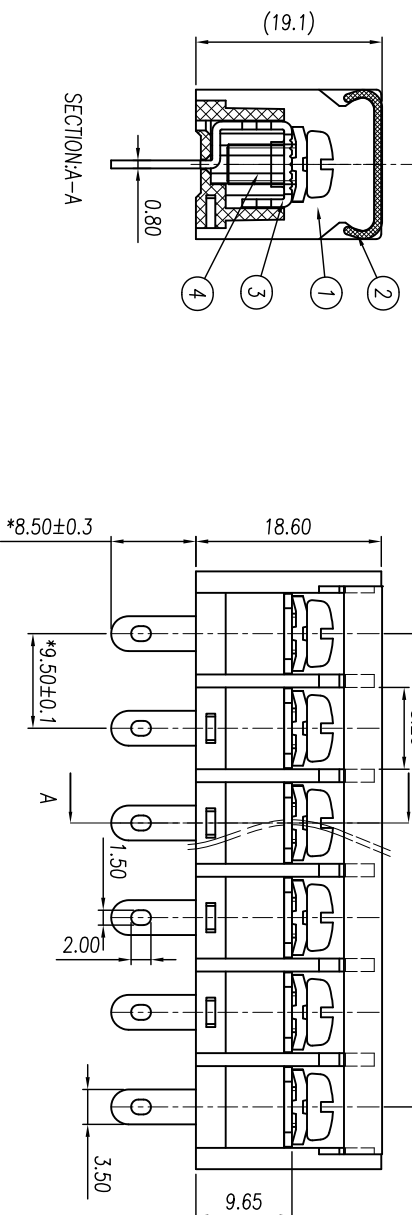


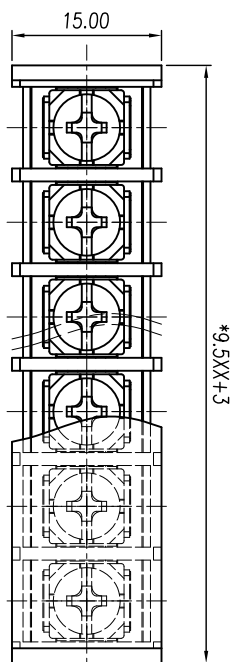

慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD

产品规格书
THE SPEC SHEET

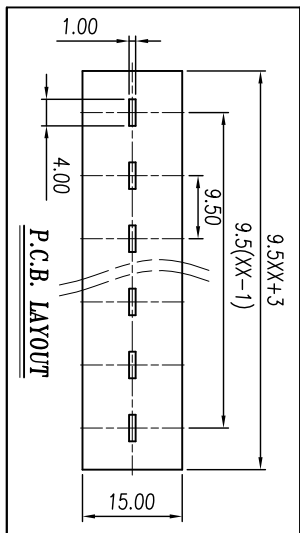

电气性能/Electrical

参考标准/Standard	UL	IEC
额定电压/Rated voltage	300V	750V
额定电流/Rated current	20A	32A
接触电阻/Contact resistance	20mΩ	
绝缘电阻/Insulation resistance	500MΩ/DC500V	

使用线径/Wire range 22-12AWG 4.0mm²

耐电压/Wrt standing voltage AC 2000V/1 Min

机械性能/Mechanical

扭矩/Torque 1.2Nm(10.6lb.in)

温度范围/Temp.Range -40°C~+105°C

瞬时温度/MAX Soldering +250°C, for 5 Sec

尺寸/Dimensions

间距/Pitch 9.5mm

极数/Poles 2~22p

材质及电镀/Material

塑件/Housing	PA66, UL94V-0
螺丝/Screws	M4.0 Steel Ni plated
焊脚/Pin header	Brass 0.8t Tin plated
盖板/Cover	PC, UL94V-2

linear dimension(Tolerances Standard GB/T 14486-2008)

tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06	0.12	0.4
variable range	6 to	6 to	10 to	18 to	30 to	50 to	80 to	120 to	160 to	200 to	250 to	all	5 to	5 to	30 to	120 to
tolerance	over	over	over	over	over	over	over	over	over	over	over	≡	—	□	//	⊥



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

名称/TITLE
WJ48H-XXP-1YY-00A



第三视图/THIRD ANGLE PROJECTION