HFA2

SAFETY RELAY (RELAY WITH FORCIBLY GUIDED CONTACTS)





File No.:B120753286005



Features

- Multi contact arrangements: 2 Form C (2Z type), 1NO+1NC (HD1 type), 1NO+1NC (HD2 type)
- Forcibly guided contacts according to EN50205
- 6A switching capability
- High insulation capability (1.2 / 50µs):10kV surge voltage between coil & contacts and 6kV between contact sets
- UL insulation system: Class F available
- Environmental friendly product (RoHS compliant)
- Outline Dimensions: (29 x12.6 x25.5) mm

C	O	N	Ш	A	C	D	Α	ΓΑ	

Contact arrangement	2 Form C (2Z type) 1NO+1NC (HD1 type) 1NO+1NC (HD2 type)
Forcibly guided contacts Type (according to EN50205)	HD1, HD2 type: Type A 2Z type: Type B
Contact resistance	100mΩ max. (at 1A 6VDC)
Contact material	AgSnO ₂
Contact rating (Res. load)	6A 250VAC / 30VDC
Max. switching voltage	400VAC / 30VDC
Max. switching current	6A
Max. switching power	1500VA / 180W
Typical application load	AC-15 (according to IEC60947-5-1) NO: 3A 250VAC (inrush current 30A) NC: 1.5A 250VAC (inrush current 15A)
Mechanical endurance	1 x 10 ⁷ ops
Electrical endurance ¹⁾	NO:1 x 10 ⁵ ops NC:1 x 10 ⁴ ops

Notes: 1) Applicable for rated load only on 1NO or 1NC.

COIL DATA at 23°C Pick-up Drop-out Max. Nominal Allowable Voltage Voltage Coil resistance Voltage Voltage VDC VDC VDC Ω VDČ

VDC	Max.	Min.	VDC	Ω
5	3.80	0.5	7.5	35.7 x (1±10%)
6	4.50	0.6	9.0	51 x (1±10%)
9	6.80	0.9	13.5	116 x (1±10%)
12	9.00	1.2	18	206 x (1±10%)
15	11.3	1.5	22.5	321 x (1±10%)
18	13.5	1.8	27	483 x (1±10%)
21	15.8	2.1	31.5	630 x (1±10%)
24	18.0	2.4	36	823 x (1±10%)
36	27.0	3.6	54	1851 x (1±10%)
40	30.0	4.0	60	2286 x (1±10%)
48	36.0	4.8	72	3291 x (1±15%)
60	45.0	6.0	90	5142 x (1±15%)
80	64.0	8.0	120	9143 x (1±15%)
110	82.5	11.0	165	17285 x (1±15%)

CHARACTERISTICS

Insulation r	esistance	1000MΩ (at 500VDC)		
5	Between coil & contacts	4000VAC 1 mir		
Dielectric strength	Between open contacts	1500VAC 1 min		
Suengui	Between contact sets	3000VAC 1 min		
•	Between coil & contacts	10kV (1.2 / 50μs)		
Surge voltage	Between open contacts	2.5kV (1.2 / 50µs)		
voltage	Between contact sets	6.0kV (1.2 / 50μs)		
Operate tir	ne (at rated voltage)	15ms max		
Release tir	ne (at rated voltage)	10ms max.		
		NO:10Hz to 55Hz 1.6mm DA		
Vibration re	esistance	55Hz to 200Hz, 98m/s ²		
		NC:10Hz to 55Hz 0.4mm DA		
Shock	Functional	NO:98m/s ² NC: 49m/s ²		
resistance	Destructive	980m/s ²		
Creepage	Between coil & contacts	8mm		
distance	Between contacts	5.5mm		
Clearance	Between coil & contacts	8mm		
distance	Between contacts	5.5mm		
Humidity		5% to 85% RH		
Ambient te	mperature	-40°C to 70°C		
Termination	n	PCB		
Unit weight	t	Approx. 20g		
Construction	on	Plastic sealed		

Notes: 1) UL insulation system: Class F, Class B.

COIL

|--|


SAFETY APPROVAL RATINGS				
	6A 250VAC / 277VAC / 30VDC at 70°C			
UL/CUL	NO: Pilot duty A300, at 70°C			
	NC: Pilot duty B300, at 70°C			
	NO: 8A 250VAC at 85°C			
	NC: 6A 250VAC at 85°C			
TÜV	NO: 3A 240VAC(AC-15) at 55°C			
	NC: 1.5A 240VAC(AC-15) at 55°C			




HONGFA RELAY

ISO9001、ISO/TS16949、ISO14001、OHSAS18001、IECQ QC 080000 CERTIFIED

2013 Rev. 1.00

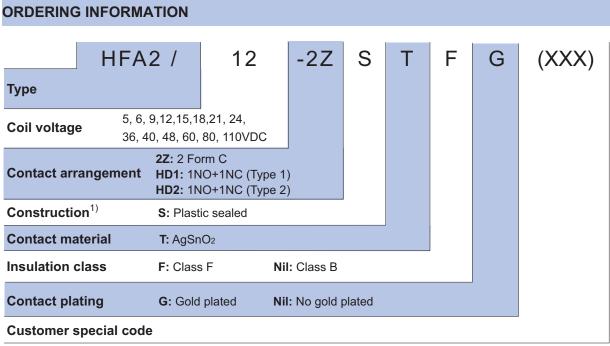

Notes: 1) If water cleaning is required after the relay is assembled on PCB, please contact us for suggestion about suitable parts.

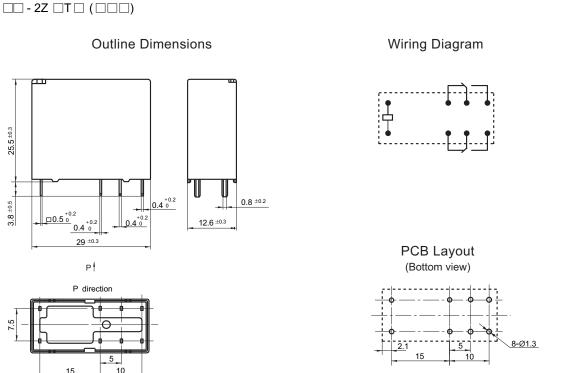

OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

HFA2/ □□ - HD1 □ T □ (□□□)

Outline Dimensions

0.8 ±0.2

0.4 0


29 ±0.3


P †

P direction

5


Wiring Diagram







HFA2/ □□ - HD2 □T □ (□□□)



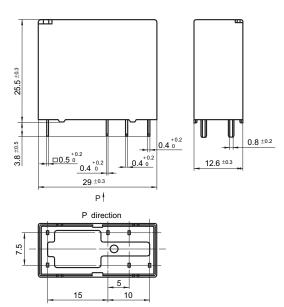

Wiring Diagram





Remark: 1) In case of no tolerance shown in outline dimension: outline dimension \leq 1mm, tolerance should be ±0.2mm; outline dimension >1mm and \leq 5mm, tolerance should be ±0.3mm; outline dimension >5mm, tolerance should be ±0.4mm.

2) The tolerance without indicating for PCB layout is always ±0.1mm.

Disclaimer

This datasheet is for the customers' reference. All the specifications are subject to change without notice.

We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.