

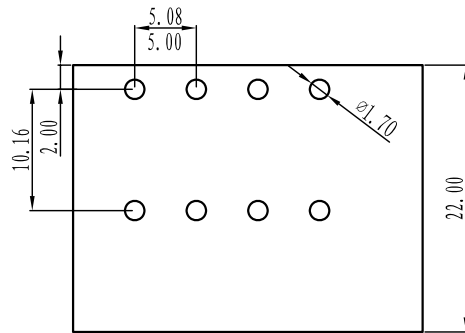


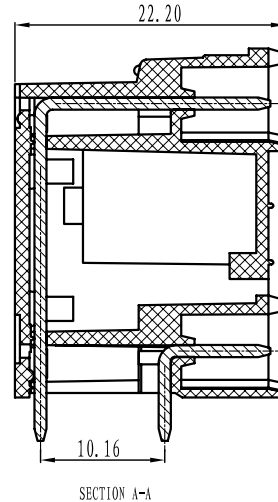

# 慈溪市万捷电子有限公司

## CIXI WANJIE ELECTRONIC CO., LTD

产品规格书  
product specification

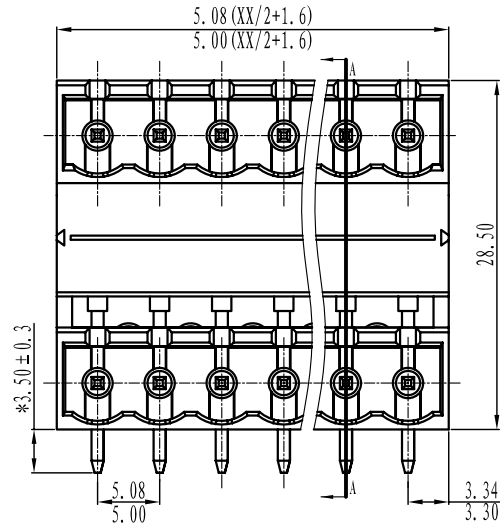

### 电气性能/Electrical

- 参考标准/Standard: UL IEC
- 额定电压/Rated voltage: 300V 320V
- 额定电流/Rated current: 15A 10A
- 接触电阻/Contact resistance: 20mΩ
- 耐电压/Withstanding voltage: AC2000V/1Min
- 绝缘电阻/Insulation resistance: 500MΩ/DC500V

### 机械性能/Mechanical

- 温度范围/Temp.Range: -40° C~+105° C
- 瞬间温度/MAX Soldering: +250° C, for 5 Sec

### 尺寸/Dimensions

- 间距/Pitch: 5.08mm/5.00mm
- 极数/Poles: 2P-24P


### 材质及电镀/Material

- 塑件/Housing: PA66, UL94V-0
- 焊针/Pin header: Brass, Tin plated

TOLERANCES EXCEPT AS NOTED

variable range	linear dimension				fillet	chamfer	short angle sid				≡	—	□	//	⊥	
	to 6	over 6 to 30	over 30 to 120	over 120 to 480	to all	to 6	to 10	to 50	to 120	to all						to 5
tolerance	±0.1	±0.2	±0.3	±0.5	±0.2	±0.5	±1	1'	30'	20'	10'	0.5	0.025	0.06	0.12	0.4

订购方式:  
HOW TO ORDER

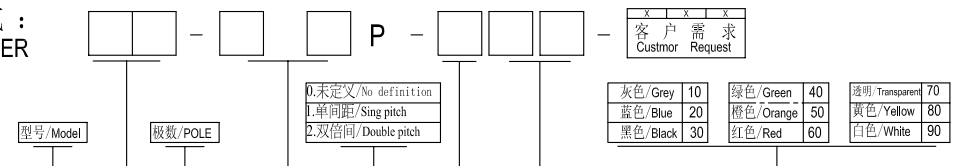

单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	第一视角/FIRST ANGLE PROJECTION	
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						